

Appliance Tester/Power Analyzer

✓ Compact, battery operated device for analyzing AC power loads
With PC interface plus datalogging

Features:

- Four simultaneous displays of Watts, Power Factor or VA, Voltage or Hz, Amps
- True RMS Voltage & Current measurements of sine, square, triangular and distorted wave forms with a crest factor < 5
- Max, Data Hold and Overload Protection
- Battery or AC adaptor provides line isolation
- Plug device to be tested directly into the Power Analyzer
- Sampling (update) rate is 2.5 times/second
- Windows[®] 95/98/NT/2000/XP/ME software allows user to download stored data or save data directly, and to create an ASCII file. Computations include phase angle, apparent and reactive power, consumption and cost, and power factor correction
- Complete with Windows compatible software, cable, 8 x AA batteries, power cord, 117 VAC adaptor and case



Applications:


- Measure and Audit power consumption of single phase devices
- Evaluate load performance under varying line conditions
- Demonstrate effectiveness of power conservation efforts
- Characterize device AC power requirements

Model 380803 Datalogger

- Built-in Datalogger stores up to 1,012 readings (Single record storage or continuous datalogging)

Model 380801

- Used for data acquisition when connected to a PC

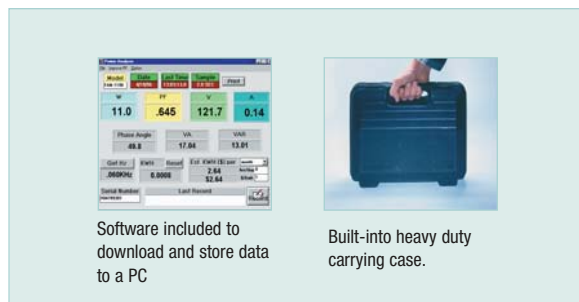

Software included to download and store data to a PC

Built-in heavy duty carrying case.

| Specifications: | Range | Resolution | Basic Accuracy (%rdg) | Input Signal Range |
|-------------------|--|-------------|-----------------------|---------------------|
| Watt | 200/2000W | 0.1/1W | ±(0.9% + 4d)@50/60Hz | 300V, 20A, 40-400Hz |
| Power Factor | 0.5 to 1.0 | 0.001 | (Based on W, V, A) | 250V, 20A, 50/60Hz |
| Voltage | 200.0/750V | 0.1/1V | ±(0.5%) | 750VAC |
| Current | 2/20A via terminals 2/15A via sockets | | ±(0.5%) | (Fuse Protection) |
| Frequency | 40Hz to 20kHz | 1Hz to 10Hz | ±(0.5%) | |
| Dimensions/Weight | 13.9 x 11.8 x 3.9" (352 x 300 x 100mm) / 3.6 lbs. (1.6 kg) | | | |

Ordering Information:

- 380801 True RMS Single Phase Power Analyzer
- 380801-NIST 380801 with Calibration Traceable to NIST
- 380803 True RMS Power Analyzer Datalogger
- 380803-NIST 380803 with Calibration Traceable to NIST
- USB100 RS-232 to USB Adaptor



The Right Source For Your Test & Measurement Needs

8715 Mesa Point Terrace San Diego, CA 92154
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012
Email: sales@calright.com <http://www.calright.com>