


7075 WAVEFORM GENERATOR

SIGNAL SOURCE

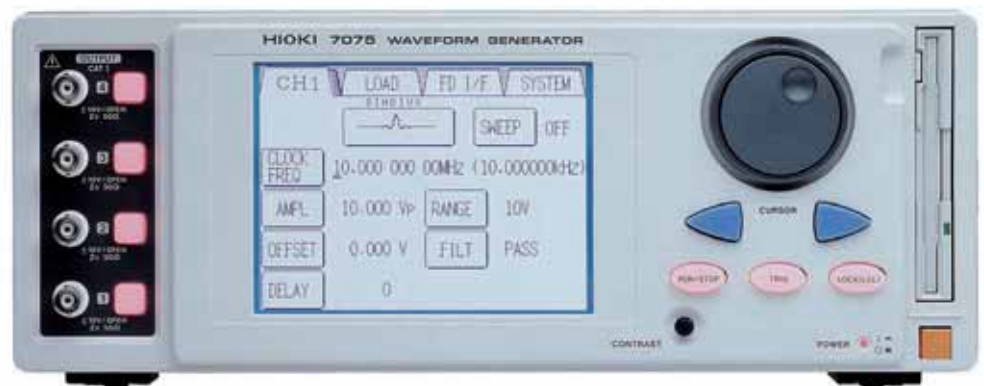

Internal Sweep Sequence Functions

Arbitrary Waveform Generator with Four Independently Controllable Channels

The 7075 WAVEFORM GENERATOR includes both function generator and arbitrary waveform generator capabilities. The function generator provides 8 standard waveforms such as sine and square waves. Basic capabilities of the custom waveform generator include long-duration, high-quality waveform output from a 128,000-word memory, 10 MHz clock rate and 16-bit resolution. The function generator and arbitrary waveform output functions can be swept according to various parameters such as frequency and amplitude, making this waveform generator ideal for simulating multiple signal sources for evaluation.



The Right Source For Your Test & Measurement Needs

2232 Verus Street Suite D San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
Email: sales@calright.com <http://www.calright.com>



ISO14001
JQA-E-90091

Even for Complex Signals, Evaluation is Made Easy



Features

1. Multiple Channels

Four channels (7075) or two channels (7075-01) are provided in a compact, lightweight unit. Multi-channel evaluations such as 3-phase motor simulations can be produced with a single device.

2. Channel-Independent Operation

Waveform selection and various settings, including custom waveform sampling clock frequency and sweep control can be set and activated independently for each channel.

3. Simple Operation

Simple, direct operation is provided by a touch panel user interface.

4. Easy to Use with Actual Waveforms

Waveforms measured with a MEMORY HiCORDER can be downloaded to 3.5" floppy disk or GP-IB. Amplitude and time axes data are downloaded together, so the actual waveforms can be reconstructed. Waveforms and settings can also be saved. The floppy drive is compatible with 1.44-MB MS-DOS format.

5. Synchronized Drive Capability

With one unit configured as the master, up to four units (16 channels) can be driven synchronously.

6. Timing Simulation by External Trigger


Each channel can be independently triggered by terminals on the rear, so various timings can be simulated.

7. Bundled Waveform Creation Software

The bundled 7990 WAVEFORM CREATION SOFTWARE creates waveforms in the Windows™ environment on a PC. Capabilities range from custom waveform design to processing actual waveform simulations. Created waveforms are transferred to the 7075 by floppy disk or RS-232C interface.

8. External Control

External control can be provided through the GP-IB interface. Waveforms from a MEMORY HiCORDER can also be downloaded by GP-IB.

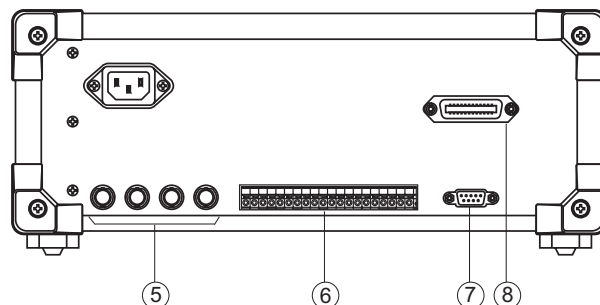

Basic Features

• Large 128,000-Word/Channel Memory

The large arbitrary waveform memory consists of 128,000 words per channel. Even at the fastest 10 MHz clock, 12.8 ms custom waveforms can be output.

• 16-Bit Voltage Axis Resolution, Up to 10 MHz Clock

The 16-bit resolution on the voltage axis and 10 MHz maximum clock provide faithful reproduction of actual waveforms and high-quality custom waveform output capability.


Three output ranges (0.1, 1 and 10V peak) are provided.

• Sweep Sequence Functions Installed

Frequency, amplitude and offset can be swept simultaneously, and combinations of sweep conditions in up to 128 steps allow easy generation of complex signals for evaluation.

• Eight Basic Waveforms Built In

Eight basic waveforms: sine, square, pulse, triangle, ramp up, ramp down, noise and DC are selectable in the function generator mode. Eight waveforms can also be stored in the arbitrary waveform mode, allowing quick handling of all types of waveforms.

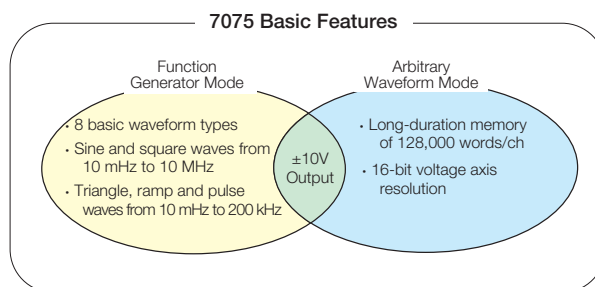

Easy Touch Panel Operation



Operating Screen Examples

1

Output Settings Screen

The settings for output waveforms on every channel are simultaneously displayed.

Waveform Selection Screen

The desired standard function generator waveform can be selected from sine wave, square wave, etc., or a list of arbitrary waveforms can be selected.


Sweep Setup Screen

A waveform is selected and related sweep selections such as frequency and amplitude can then be set, as well as basic setting of non-sweep functions.

Sweep Table Editing Screen

Sweep conditions such as amplitude and frequency for each item can be set, for sequences of up to 128 steps.

	TIME(s)	START(V)	STOP(V)	LOOP
001	3.0000	0.100	5.000	1
002	2.0000	5.000	5.000	1
003	1.0000	5.000	2.000	1
004	2.0000	2.000	2.000	1
005	500.00m	2.000	0.100	1

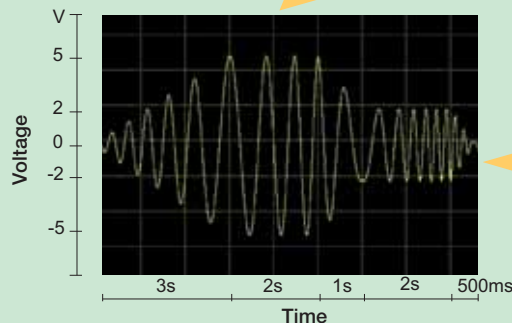

2

Waveform Input Screen

Up to 8 waveforms can be entered and stored in the unit.

Arbitrary Waveform List Screen

All waveforms entered in the 7075 are displayed.

Arbitrary Waveform View Screen

Displays details of an entered waveform. The waveform image, amplitude, output time and other information can be confirmed.

3

Floppy Disk/Interface Setup Screen

Sets up the floppy disk, GP-IB and RS-232C interfaces.

Floppy Disk Save/Load Setup Screen


Waveforms can be saved and floppy disk conditions can be set, or files loaded into the unit.

File name	Size	Date
NOISE .WFG	4848	99:06:10
CHOP_SIN.WFG	2512	98:11:30
DIP .WFG	2788	98:11:24
HARM .WFG	2512	98:11:20
AMPSWP .WFG	4848	98:11:20
OVERSHT .WFG	2100	98:11:20

4

System Screen

Configure basic operating settings of the unit.

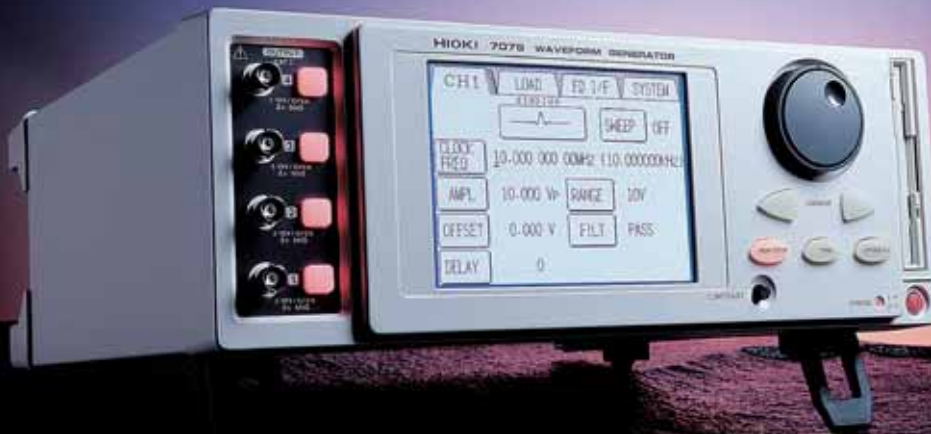

High Performance in a Compact Package



7075 Application Functions


• Sweep Sequence Functions

Waveform amplitude, frequency, offset and duty cycle* can be swept simultaneously, so multi-pattern signals can be easily generated.

- * Duty cycle setting applies only to pulse waveforms.
 - Table-style entry of up to 128 steps
 - Settable step loop time
 - Sequence control by external signals
 - Long-duration sweep and high-speed data refresh
- Sweep time of 0.01 ms to 1000 s
Maximum data refresh speed of 1 μ s

SWEEP Editor		C.H1		BACK	
FREQ		AMPL		OFFSET	
TIME(s)	START(V)	STOP(V)	LOOP		
001 200.00m	100.00	100.00	1		
002 200.00m	100.00	100.00	∞		
003 150.00m	100.00	50.00	H 5		
004 1.0000	50.00	125.00	1		
005 2.0000	125.00	300.00	1		
NEXT		PREV		INSERT DELETE OK	

Example of simultaneous amplitude and frequency sweep setting

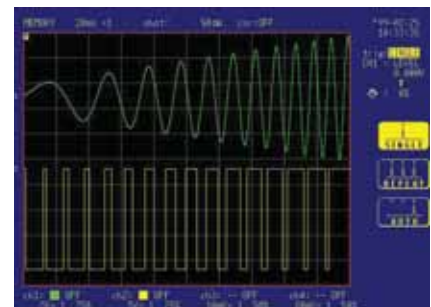


Output waveform example

CH1: Simultaneous sweep of amplitude and frequency of a sine wave
CH2: Duty cycle sweep of a pulse wave


• Trigger Functions

When Hold is enabled for a sequence loop, the Hold can be canceled by the trigger. Specifically, an external trigger can be applied to each channel independently, so variations can be imposed on the output according to custom timing differences between channels.

This function is useful in, for example, an automobile ABS simulation in which signals for the four wheels can be controlled independently.

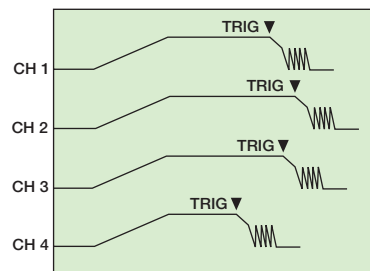

Output controlled by custom timing

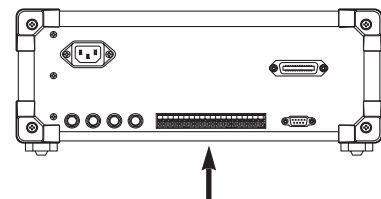

Output timing can be controlled by trigger input for each channel at the external control terminals on the rear panel.

• Low-Pass Filter Functions

14 types of low-pass filter with 1-2-5 progression are built in.

Device testing capabilities are enhanced by selectably filtering the test signal, such as for noise tests.

FILTER Settings		BACK	
PASS	50kHz	1kHz	
1MHz	20kHz	500Hz	
500kHz	10kHz	200Hz	
200kHz	5kHz	100Hz	
100kHz	2kHz	50Hz	

14 types of low-pass filter



Download Waveforms or Create on a PC



Custom Waveform Input

• Downloading from a MEMORY HiCORDER

Actual measured waveforms saved in a **HIOKI MEMORY HiCORDER** can be downloaded by floppy disk or GP-IB. All data types are loaded, so the actual measured waveforms are accurately reconstructed. Other data besides the waveform image and amplitude- and time-axis information is downloaded, so the regeneration process is straightforward.

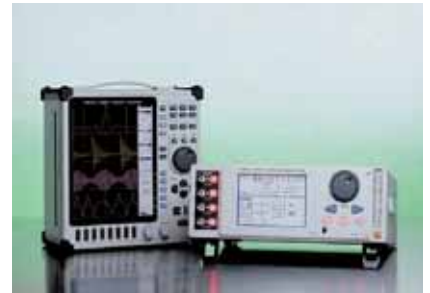
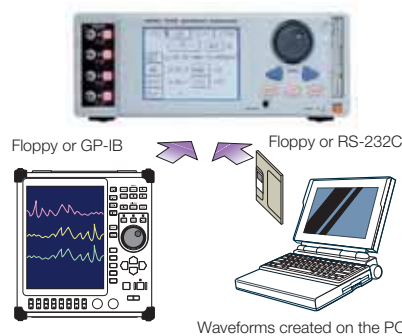


See the list of related products on page 8 for downloadable MEMORY HiCORDER.

• Converts Text Data to Waveforms

Waveforms stored as CSV data can be reconstructed on the **7075**.


Here is an example of waveform data in Excel™ that was saved as text data, loaded into the **7075** and reconstructed.

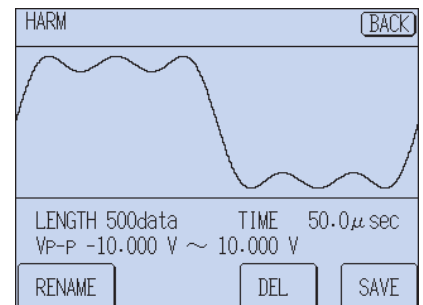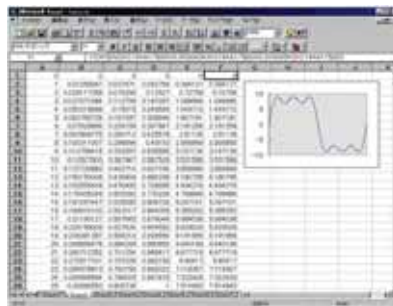

7990 WAVEFORM CREATION SOFTWARE

• Waveform Creation in the Windows™ Environment

Install the bundled **7990 WAVEFORM CREATION SOFTWARE** on your PC to easily create waveforms by entering either waveforms or mathematical functions. Actual waveform data can also be downloaded and processed, so noise can be added and multiple complex waveforms can be quickly created.

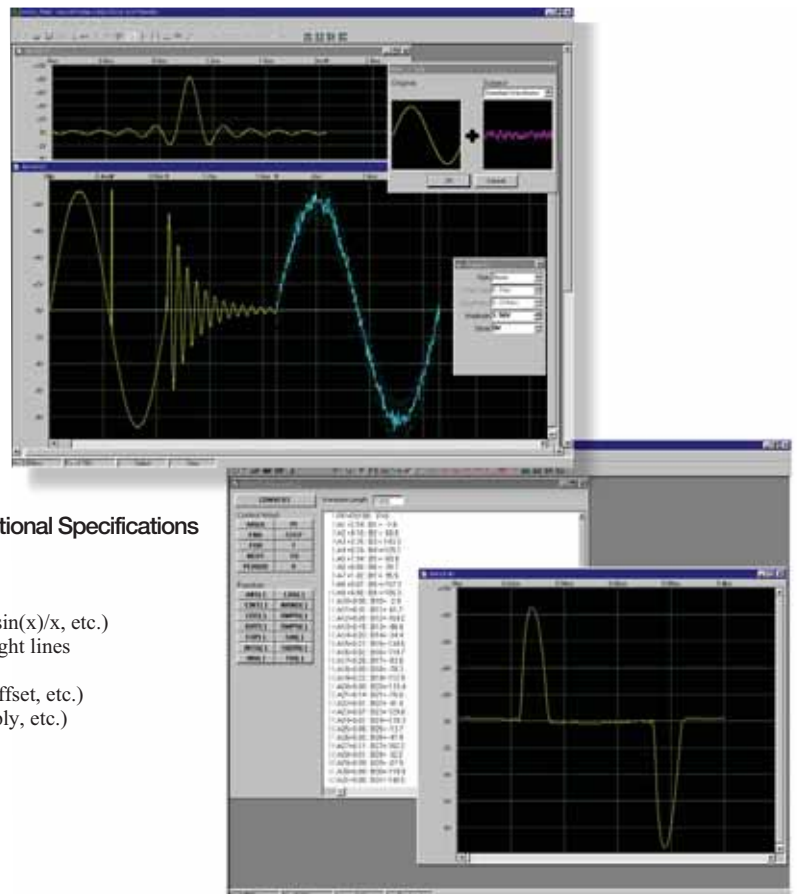

■ 7990 WAVEFORM CREATION SOFTWARE Functional Specifications

• Features

- Create waveforms by entering functions
- Standard waveform entry (sine, triangle, square, ramp, $\sin(x)/x$, etc.)
- Enter waveforms by drawing free-hand curves and straight lines
- Edit entered waveforms (cut, copy, paste, clear, etc.)
- Modify entered waveforms (width, height, amplitude, offset, etc.)
- Calculate with entered waveforms (add, subtract, multiply, etc.)
- Magnify, reduce and scroll waveform displays
- Save and load created waveforms
- Transfer waveform data (RS-232C)

• Operating Environment

Operating Systems: Windows95™, WindowsNT™ 4.0
Memory: at least 16 MB
Hard Disk: at least 4 MB free space



The Right Source For Your Test & Measurement Needs

2232 Verus Street Suite D San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
Email: sales@calright.com <http://www.calright.com>


Effective Simulations with Four Independently Controlled Channels




Applications

• ABS Simulation

The external trigger feature can be used to control the output timing of each channel, to simulate signals from the four wheels independently. Smoothly increasing and decreasing speed waveforms can be easily output with the sweep functions.




Independent 4-wheel ABS simulation




• 3-Phase Motor Simulation

A 3-phase waveform controlled at 120° phase can be simulated using 3-channel simultaneous output. Simulations such as abnormal waveforms and noise can be applied to each phase independently.

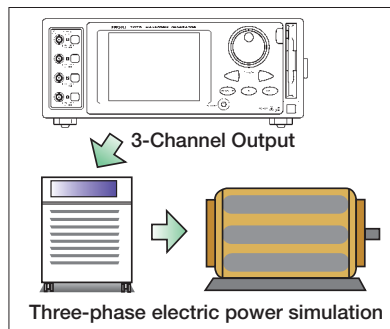

Three-phase electric power simulation

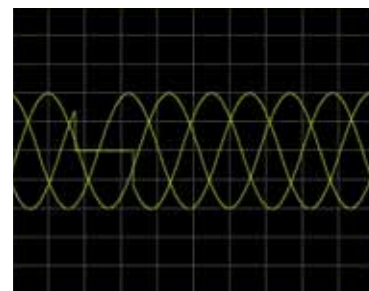

Three-phase momentary drop-out waveform example

• Other Simulations

Automotive, Machinery: Engine electronic control evaluation, vibration testing, etc.


Control simulations requiring high precision such as servo motors.

Home Appliances, OA Devices: Simulation of power source anomalies such as harmonics and noise.


Test signals for inverter control devices, motor speed-up and slow-down tests for copy machines, etc.

Audio, Communications: Frequency characteristic testing by sweep, and transmit modulation testing of radio equipment, phase characteristic testing, etc.

Medicine, Biology: Evaluation signals for medical devices such as EKG and EEG, living tissue signal simulations




Motor speed-up and slow-down sweep example for copy machine




• Output Waveform Examples

Parameters such as linear sweep and phase control of a waveform can be adjusted within the 7075, but more complex waveform processing and coupling of different waveforms types requires the bundled 7990 Waveform Creation Software to carry out the processing on the PC, allowing output of various types of waveforms.

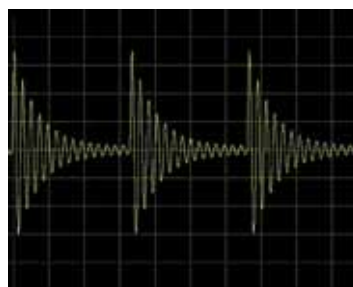


Damping Waveform Example

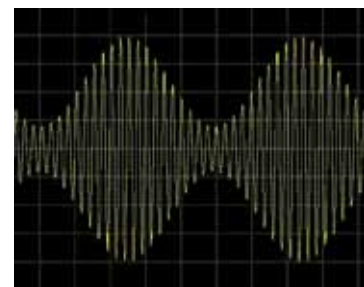


AM Modulation Waveform Example



$\sin(x)/x$ Waveform Example

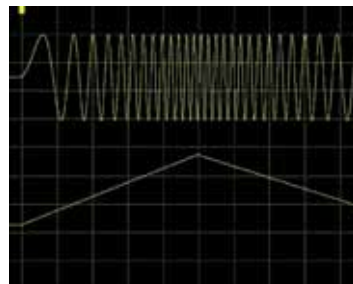

Frequency Sweep Waveform Example

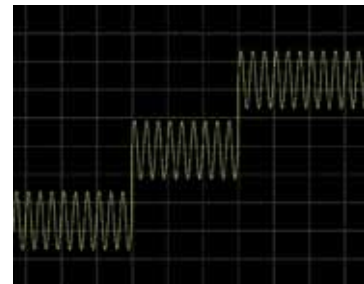

Offset Sweep Waveform Example



Specifications (23°C ± 5°C/73°F ± 9°F, after 30 minutes warmup)

-1. General Specifications

Number of Channels:	4 (7075), 2 (7075-1)	Environmental Conditions:	Operating temperature: 10 to 40°C (50 to 104°F) 85% RH or less Storage temperature: -10 to 50°C (14 to 122°F) 85% RH or less
Output Functions:	Function Generator, Arbitrary Waveform Generator (settable for each channel)	(non-condensating)	Operating location: Indoors, at less than 2,000m (6,562-ft.) altitude
Display:	5.7" LCD (with Touch Panel)	Power:	Auto selects 100, 120, 200 or 230 VAC (±10%), 50/60 Hz
Language:	Japanese or English selectable	Maximum Rated	120 VA
External Memory System:	3.5" Floppy Drive	Dissipation:	
	Storage Capacity: 1.44 MB, 1.2 MB and 720 kB compatible (1.2 MB format is non-standard)	Dimensions and mass :	345W × 130H × 286D mm, 7.8 kg (7075) / 7.5 kg (-01)
	Data format: MS-DOS™ format	Accessory:	13.6" W × 5.1" H × 11.3" D, 275 oz. (7075) / 265 oz. (-01)
Interfaces:	GP-IB (IEEE 488.1 compliant. Refer to IEEE 488.2)	Conforming Standards:	7990 WAVEFORM CREATION SOFTWARE (3 floppy disks)
	RS-232C (Dsub 9-pin connector, 19200, 9600 and 4800 bps speed, for waveform data transfer only -- not for control)	EMC	EN55011:1991+A1:1997+A2:1996
Electrostatic Endurance:	Power (cumulative)- single pulse to chassis/ AC 1.5 kVrms for 1 min. 25 mA	Safety	EN50082-1:1992 EN61010-1:1993+A2:1995 Pollution level 2, Overvoltage category II (anticipated transient overvoltage 2.5 kV)

-2. Analog Output (common to Function Generator and Custom Waveform Outputs)

Max. Output Voltage:	±10 V o.c. (o.c. = open-circuit)	Output Impedance:	50 Ω ±2% (DC)
Amplitude Setting Ranges:	10 V Range: 0 to 10 V o.c. (1 mV resolution) 1 V Range: 0 to 1 V o.c. (0.1 mV resolution) (setting is peak level) 0.1 V Range: 0 to 0.1 V o.c. (0.01 mV resolution)	Rise and Fall Times:	< 45 ns (from 10 to 90% of peak amplitude square wave, with LPF bypassed, RL=50 Ω)
DC Offset: (setting range)	10 V Range: -10 V to 10 V o.c. (1 mV resolution) 1 V Range: -1 V to 1 V o.c. (0.1 mV resolution) 0.1 V Range: -0.1 V to 0.1 V o.c. (0.01 mV resolution)	Overshoot:	Selected amplitude (within ±5% of p-p value of square wave, with LPF bypassed, RL=50 Ω)
Minimum Load Impedance:	40 Ω	Interchannel Skew:	Within 25 ns (determined at simultaneous waveform selection)
		Output Range	1 V Range: add 0.2% of range to 10 V range accuracy 0.1 V Range: add 0.4% of range to 10 V range accuracy
		Accuracy:	
		Note:	refer to the following Function Generator and Arbitrary Waveform Generator sections for 10 V range accuracy

-3. Function Generator Mode (Accuracy is determined at 10V range)

Waveform Types:	sine, square (fixed 50% duty), triangle, ramp-up, ramp-down, pulse, noise, DC	DC Offset Accuracy:	within ±0.5% ±25 mV of setting
Frequency Range:	Sine wave: 0 to 10 MHz (10 mHz resolution) Square wave: 0 to 10 MHz (10 mHz resolution) Triangle wave: 0 to 200 kHz (10 mHz resolution) Ramp waves: 0 to 200 kHz (10 mHz resolution) Pulse wave: 0 to 200 kHz (10 mHz resolution)	DC Offset Stability:	within ±DC Offset Accuracy × 0.1 per °C
Frequency Accuracy:	within ±50 ppm ±50 μHz of setting	Amplitude Accuracy:	within 2% ±20 mVrms of setting (for 1 kHz sine wave)
		Amplitude Stability:	within (Amplitude Accuracy × 0.1) per °C
		Phase Adjustment:	-360.00 to 360.00° (0.01° resolution)
		Jitter:	within 100 ns p-p (triangle, ramp and pulse waves)
		Square Wave Duty Cycle:	fixed (40 to 60%)
		Pulse Wave Duty Cycle:	adjustable from 1 to 99% (0.1% resolution) (Pulse width must be 100 ns or greater)

-4. Arbitrary Waveform Generation Mode (Accuracy is determined at 10V range)

Voltage Axis Resolution:	16 bits (64,000 counts)	Amplitude Accuracy:	within 2% ±20 mVrms of setting (for 10,000 Words, 10 MHz clock sine wave)
Waveform Memory Capacity:	128,000 Words/channel (channel independent)	Delay:	Settable within ±128,000 in 1-clock units
Filtering:	2-stage LPF, 50 Hz to 1 MHz (14 steps in 1-2-5 progression)	Custom Waveform Clock:	Max. 4 channels (same as waveform output) Frequency range: 10 mHz to 10 MHz (10 mHz resolution) Frequency accuracy: within ±50 ppm ±50 μHz of setting Jitter: the larger of the effect within 800 ps, or within 0.05% of period setting
Waveform Input Methods:	Floppy Disk, GP-IB or RS-232C download (direct download from MEMORY HiCORDER)		
DC Output Accuracy:	within ±2% ±25 mV of setting		
DC Output Stability:	within ±DC Output Accuracy × 0.1 per °C		

-5. Sweep Functions

Sweep	Function Generator or Custom Waveform	Sweep Time:	10 μ s to 1000 s (10 μ s or 5 digits resolution)
Waveform:		Sequence	
Sweep Type:	Linear (within an individual element)	Functions:	Loop: element or group is output at specified times
Sweep Object:	Function Generator: frequency, amplitude, offset, duty cycle (duty applies only to pulse waves. Frequency, amplitude and offset can be swept simultaneously) Custom Waveform: frequency, amplitude, offset, duty (frequency, amplitude and offset can be swept simultaneously)		Hold: output of the last data element persists Sequence length: maximum 128 elements Loop Repeats: maximum 1042 times, or infinite loop Trigger: cancels infinite loop and hold, and moves to next element

-6. Control Input/Output

Inputs:	TRIG IN, RUN/STOP IN, SYNC CLK IN, MASTER CLK IN TTL levels (only TRIG is independently controllable for channels 1-4)	Outputs:	TRIG OUT, RUN/STOP OUT, SYNC CLK OUT, MASTER CLK OUT TTL levels (only TRIG is independently controllable for channels 1-4)
---------	---	----------	---

-7. Miscellaneous

Setting Format	Current Function: frequency \leftrightarrow period	Save Output	Conditions at power off, waveform backup
Selection:	amplitude, offset \leftrightarrow upper/lower limits	Conditions:	
Unit Selection:	Selectable: Hz \leftrightarrow r/min (rpm) Vpeak \leftrightarrow Vrms	Synchronized	Maximum 4 units (16 channels)
		Drive:	
		Number of	8
		Internally Storable	
		Waveforms:	

7075 WAVEFORM GENERATOR (4ch) 7075-01 WAVEFORM GENERATOR (2ch)

• OPTIONS

- 9165 CONNECTION CORD (BNC-BNC/1.5m, 59.1")
- 9166 CONNECTION CORD (BNC-CLIP/1.5m, 59.1")
- 9151-02 GP-IB CONNECTION CABLE (2m, 78.7")
- 9151-04 GP-IB CONNECTION CABLE (4m, 157.5")

Note : Product names appearing herein are trademarks or registered trademarks of various companies.



Related Products

HIOKI 8800 series MEMORY HiCORDERs are waveform storage devices that can store high-speed and transient phenomena. A full line of versions is available for applications requiring 2 to 32 channels, high-speed sampling or large memory capacity. Actual measured waveform data is saved to the unit's internal memory or external floppy disk for downloading directly to the Model 7075, enabling quick regeneration of actual waveforms. Also, with the bundled

7990 Waveform Creation Software, actual measured waveforms can be loaded into the PC for unlimited processing.

- Downloadable Models (through floppy disk, GP-IB or PC)
- 8806, 8806-1, 8807, 8808, 8825, 8826, 8835-01, 8830S, 8840, 8841, 8842, 8845, 8846, 8850, 8851, 8852, 8852-01, 8853, 7070



8807/8808

2, 4ch
400 kS/s
256k(1ch) to 128kW(2ch),
256k(1ch) to 64kW(4ch)
PC Card



8826

Max. 32 ch/Color display
1 MS/s
4M (1 ch) to 500 kW (32 ch)
Floppy/MO disk, PC Card



8835-01

Max. 8 ch/Color display
1 MS/s
4 MW (1 ch) to 500 kW (8 ch)
Floppy disk, PC Card



8841/8842

Max. 16 ch/Color display
1 MS/s
4M (1 ch) to 500 kW (16 ch)
Floppy/MO disk, PC Card



8845/8846

Max. 16 ch/Color display
200 kS/s
1M (2 ch) to 100 kW (16 ch)
DAT(8845), MO(8846)



8852/8852-01

4 ch
100 MS/s
16M (1 ch) to 4 MW (4 ch)
Floppy disk



The Right Source For Your Test & Measurement Needs

2232 Verus Street Suite D San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
Email: sales@calright.com <http://www.calright.com>