

Surge Testers

MegaPulse Antenna Surge PF 65




High Voltage Impulse Generator

The Megapulse Antenna Surge PF is a surge generator specifically designed to comply with the following standards:

- EN60065 paragraph 10.1; and its variants worldwide
- UL 60950-1 Annex N, Table N.1, Line 3; and its variants worldwide
- IEC 62368-1 Annex D, Table D.1, Line 3; and its variants worldwide

Features

- Test voltage up to 10kV.
- Voltage meter indicates capacitor charge voltage.
- Capacitor charge voltage set, charge command and trigger is controlled manually from the front panel or via optional USB TestMinder control.
- Ergonomically designed for safety, speed and efficiency.
- Supplied external interlock disables HV output and defeats test when circuit is open.
- 4 M Ω load resistor included.
- Cables, manual and calibration certificate included.
- Design includes IEC 65 Switch
- One year calibration cycle
- One year warranty

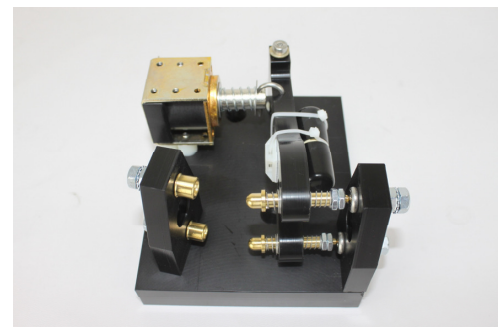

IEC 65 SWITCH

MegaPulse Antenna Surge PF 65



Specifications

Capacitor Charge Voltage:	10kV $\pm 3\%$
Main Internal Capacitor:	1nF
Internal Virtual Resistor:	1000 Ω $\pm 3\%$
Internal HV Power Supply	
Output Impedance:	15 M Ω
Trigger Relay:	Complies with IEC 65, Para. 10.1
Voltage Control:	Manually, by turning a knob in front panel; or by optional USB computer control (Windows 32 bit)
Polarity Control:	Positive
Voltage Display:	5 digit LED display
Voltage Meter Resolution:	5V
Duty Cycle:	A pulse every 5 seconds, continuous duty (Per the Standard requirement of 50 discharges at a maximum rate of 12 per minute)
Line Voltage:	120V AC, 60/50Hz *optional different line voltage
External Interlock:	Two position terminal block, closed circuit required for operation



Environmental

Operating Temperature:	15-40 °C
Relative Humidity Range:	0-90% non-condensing



General

Dimensions:	17" wide x 6" high x 17" in deep
Weight:	30 lbs approx.
Product Package:	<ul style="list-style-type: none">• Megapulse Antenna Surge PF tester• Megapulse Antenna Surge PF product manual• High Voltage Test Lead(Red), 4 feet• High Voltage Test Lead (Black), 4 feet• NIST traceable calibration certificate to ANSI Z540• Calibration waveforms



Options

BNCV:	1000:1 BNC Output, compensated for 1M Ω , for pulse delivery reference only
TMM:	Testminder USB computer interface software. Automatic trigger at repetition rate pf 5 sec/pulse, for up to 49,900 continuous pulses. Provides a test record with test information. Compatible with Windows 32 and 64 bit
*220, 230 or 240:	Mains voltages available: 220V, 230V and 240V.