

pressure

**JOFRA**  
calibration

» **Ex Safety Certifications**

ATEX: II 2 G Ex ia IIB T3 Gb  
(Ta=-10°C to + 45°C)  
KEMA 10 ATEX 1068 X  
IECEX: Ex ia IIB T3 Gb  
(Ta=-10°C to +45°C)  
IECEX CSA 10.0013

» **Wide pressure range**

25 mbar to 700 bar FS (0.35 to 10,000 psi)

» **High accuracy**

±0.025% of reading +0.01% F.S.

» **True field calibrator**

Fully temperature compensated

» **Single or dual sensor versions**

Chose between HPC550Ex single sensor calibrator, or HPC552Ex dual sensor calibrator. A HPC552Ex might be an alternative to two separate calibrators, saving investment and cost of ownership

» **Full set of intelligent features**

Wide selection of useful functions and features. Damping, leak test, % error calculation, min/max, switch test, etc.

» **Thermometer**

High accuracy thermometer, Pt100 sensor.

» **Intrinsically Safety - Apparatus - IECEx and EU Ex standards**

JOFRA HPC550/552Ex are intended for use in explosively hazardous areas and designed to prevent ignition by electrical, sparking or heating effects.



ISO 9001 Manufacturer

Specification Sheet  
SS-HPC550Ex

## Handheld Pressure Calibrator HPC550Ex Family



... bring laboratory accuracy into the field, in a modern digital package.

The HPC550/552Ex can be used in a very broad range of applications from simple tool type jobs to complex calibration jobs in custody transfer systems. Including potential hazardous areas in Oil, Gas and Chemical industries.

The HPC550/552Ex series has been designed to meet high accuracy pressure calibration applications and facilitate your tasks. HPC550/552Ex offers features such as user configurable information display, 15 different pressure units, transmitter supply, mA input, % error calculation, voltage measurement, serial communication, and external pressure module capability. The accuracy of the HPC550/552Ex calibrators is specified in % of reading to ensure an even better accuracy and wider applicable pressure range. The HPC is temperature compensated from 0 to 45°C/32 to 113°F for on-site operation. It is a truly superior pressure calibrator for laboratory and field use, bringing laboratory accuracy into the field.

The pressure calibrator of choice in potential explosive atmospheres. The intrinsically safe HPC550/552Ex calibrators complies with ATEX / IECEx certifications and are an extension of JOFRA's well known pressure calibrator range.

HPC550/552Ex meet the needs of technicians who install, maintain, calibrate and troubleshoot equipment in petro-chemical plants, on oil platforms, in refineries, governmental bodies, commercial organizations and any location subject to the risk of potential explosion hazardous atmospheres.

**CALRIGHT  
INSTRUMENTS**

*The Right Source For Your Test & Measurement Needs*

2222 Verus Street Suite C San Diego CA 92154 USA

Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012

Email: sales@calright.com <http://www.calright.com>

### Clear graphical display

Large backlit graphical display shows current status and mode, 1, 2 or 3 measurement windows, to suit your applications and demands.

### Full set of features

Perform semi-automatic pressure switch tests, leak test, % error calculation, switch in HART resistor or other calibration tasks through the outstanding functions and features of the HPC550Ex.

### Intuitive menu system

Combination of “soft keys” and cursor keypad ensures easy operation.

### Temperature measurement

High accuracy temperature measurement port by use of the optional Pt100 sensor. A superb instrument for easy and convenient temperature measurement.

### Electrical connections

HPC calibrators are well equipped and include inputs for mA, switches and temperature measurements.

### Units

15 different engineering units on pressure measurements.

### Zero

To keep high accuracy, a dedicated zero button is available to provide convenient zero before test.

### ON / OFF

Auto shut-off to expand battery life time (user programmable).

### Pressure connections

Adapters to 1/4” NPT male and 1/4” BSP female are included as standard.



### What is an Ex area?

Ex areas can be known by different names such as “Hazardous Locations”, “Hazardous Areas” “Explosive Atmospheres”, and the like and relate to areas where flammable liquids, vapours, gases or combustible dusts are likely to occur in quantities sufficient to cause a fire or explosion.

The modern day automation of industry has meant an increased need to use equipment in Ex areas. Such equipment is termed “Ex equipment”.

### Where do you commonly use Ex equipment?

- Automotive refueling stations or petrol stations
- Oil refineries, rigs and processing plants
- Chemical processing plants
- Printing industries, paper and textiles
- Hospital operating theatres
- Aircraft refueling and hangars
- Surface coating industries
- Sewerage treatment plants
- Gas pipelines and distribution centers
- Woodworking areas
- Sugar refineries

### What is ATEX?

The ATEX directive consists of two EU directives describing which equipment and work environment is allowed in an environment with an explosive atmosphere.

ATEX derives its name from the French title of the 94/9/EC directive: Appareils destinés à être utilisés en ATmosphères EXplosibles.

Where does ATEX apply? All the 24 member countries of the European Union, plus Norway, Iceland and Liechtenstein, are subject to the directives.

### What is IECEX?

The objective of the IECEX System is to facilitate international trade in equipment and services for use in explosive atmospheres, while maintaining the required level of safety, to offer:

- International confidence in the product assessment process
- HPC Ex family is certified by CSA, stating IECEX being the certification of the future for America
- Maintaining International Confidence in equipment and services covered by IECEX Certification

## FUNCTIONAL SPECIFICATIONS

### Pressure: compound ranges

bar ..... -0.96 to 1 or 2  
bar ..... -0.82 to 7, 20 or 35

psi ..... -14 to 15 or 30  
psi ..... -12 to 100, 300 or 500

### Pressure: gauge ranges

bar ..... 70, 200, 350 or 700  
psi ..... 1,000, 3,000, 5,000 or 10,000

### Pressure: absolute ranges

bar ..... 0.025 to 1.1 or 2  
bar ..... 0.07 to 7 or 20

psi ..... 0.35 to 16 or 30  
psi ..... 1 to 100 or 300

### Pressure: differential ranges (HPC550Ex only)

mbar ..... ±25, ±70 or ±350  
psi ..... ±0.35, ±1 or ±5

### Engineering units (built-in)

User selectable ..... 15 units  
(bar, mbar, MPa, kPa, inHg@0°C, mmHg@0°C, kg/cm<sup>2</sup>, mmH<sub>2</sub>O@4°C, mmH<sub>2</sub>O@20°C, psi, inH<sub>2</sub>O@4°C, inH<sub>2</sub>O@20°C, inH<sub>2</sub>O@60°F, cmH<sub>2</sub>O@4°C, cmH<sub>2</sub>O@20°C)

### Pressure accuracy ambient temp. (18 to 28°C/65 to 82°F)

±25 mbar / 0.35 psi ..... ±0.10% F.S.  
±70, 350 mbar / 1, 5 psi ..... ±0.05% F.S.  
700 bar / 10k psi ..... ±0.025% RDG + 0.015% F.S.  
All other pressure ranges ..... ±0.025% RDG + 0.01% F.S.  
Vacuum ..... ±0.025% F.S.  
F.S. (full scale) is the numerical value of the positive pressure range.

Accuracy includes hysteresis, nonlinearity, repeatability and reference standard uncertainty, 1 Year typical long-term stability, operated inside the rated temperature span and pressure range.

For optimal performance “zero” the unit for gauge/differential measurements or enter the reference pressure for absolute measurements.

### Pressure accuracy ambient temp. (0 to 45°C/32 to 113°F)

±25 mbar / 0.35 psi ..... ±0.15% F.S.  
±70, 350 mbar / 1, 5 psi ..... ±0.10% F.S.  
700 bar / 10k psi ..... ±0.04% RDG + 0.015% F.S.  
All other pressure ranges ..... ±0.04% RDG + 0.01% F.S.  
Vacuum ..... ±0.05% F.S.  
F.S. (full scale) is the numerical value of the positive pressure range.  
Temperature effect -10 to 0°C / 14 to 32°F ±0.005% F.S./°C.

Accuracy includes hysteresis, nonlinearity, repeatability and reference standard uncertainty, 1 Year typical long-term stability, operated inside the rated temperature span and pressure range.

For optimal performance “zero” the unit for gauge/differential measurements or enter the reference pressure for absolute measurements.

### Display

LCD ..... Graphical (with light)  
Display resolution ..... 5 digits  
Display update ..... 3 times per second

### Ex Certifications

ATEX ..... II 2 Ex ia IIB T3 Gb (Ta=-10°C to +45°C)  
..... KEMA 10 ATEX 1068 X



IECEX ..... Ex ia IIB T3 Gb (Ta=-10°C to +45°C)  
..... IECEx CSA 10.0013

### Input / output (18 to 28°C/65 to 82°F)

mA range ..... 0 to 24 mA  
mA accuracy ..... ±0.015% RDG + 2 µA  
RTD range (ohms) ..... 84 to 140 Ω  
RTD accuracy ..... ±0.015% RDG + 0.02 Ω  
RTD range (temperature) ..... -40 to 155°C/-40 to 311°F  
RTD accuracy @ 0°C/32°F (temperature) ..... ±0.10°C/0.18°F  
HART® resistor ..... 250 Ω  
Peak hold capture ..... 50 milliseconds  
Switch test input ..... 5V (<1mA)  
Temperature effect outside 18 to 28°C/65 to 82°F ±0.001% F.S./°C.

### Media compatibility

Nickel plated brass and 316 stainless steel

### Environmental

Operating temperature ..... -10 to 45°C/14 to 122°F  
Storage temperature ..... -20 to 60°C/-4 to 140°F  
Ingress protection rating ..... IP54

### Pressure connection

All calibrators ..... 1/8" BSP female  
Adapters to 1/4" NPT male and 1/4" BSP female are included as standard.

### Pressure overload

Overload alarm ..... “OL” in display at approx. +20% F.S.

### Power supply

Battery ..... 4 x 1.5 VDC Alkaline  
Battery type ..... AA, LR6, MN1500, AM3  
Battery lifetime ..... Typically more than 35 hours  
Low battery indicator ..... Yes



### Instrument dimensions (LxWxH)

Calibrator ..... 201x99x50 mm / 7.9x3.9x2.0 in  
HPC550 weight (incl. battery) ..... 635 g / 22.4 oz  
HPC552 weight (incl. battery) ..... 665 g / 23.5 oz  
Calibrator, shipping ..... 243x180x80 mm/ 9.6x7.1x3.1 in  
Calibrator weight, shipping ..... 1.1 kg / 39.5 oz

### Miscellaneous

Compliance: EN 60079-0 : 2009, EN 60079-11 : 2007 & CISPR 11, Edition 5.0 - 2009 Class “B”

Function / Feature	HPC550	HPC552
Single sensor high accuracy pressure calibrator	✓	✗
Dual sensor high accuracy pressure calibrator	✗	✓
mA measurement	✓	✓
Voltage measurement	✗	✗
24 VDC transmitter supply	✗	✗
High speed pressure switch test	✓	✓
Temperature measurement with external RTD sensor	✓	✓
JOFRA APM pressure module connection	✗	✗
RS232 communication - Service and maintenance only (not to be used in hazardous areas)	✓	✓
On-line calculation of sensor error %	✓	✓
Automatic leak test timer function	✓	✓
High speed min./max. hold	✓	✓
Delta / sum calculation on pressure measurements (HPC552Ex)	✓	✓
Display contrast adjustment	✓	✓
Instrument setup lock	✓	✓
Storage of 5 setups	✓	✓
Setup of automatic off timer	✓	✓
Setup of number of display windows / measurement channels	✓	✓
Setup of temperature sensor RTD type	✓	✓
Select display high or low resolution	✓	✓
Setup of backlight timer	✓	✓
HART resistor on/off	✓	✓
Normal or dampened display update rate	✓	✓

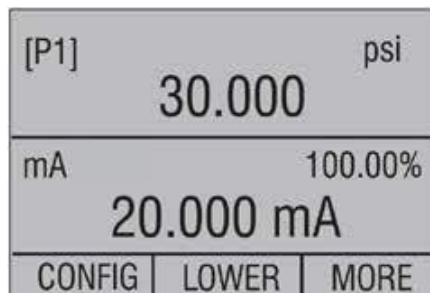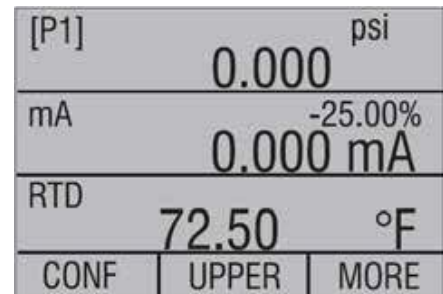

JOFRA HPC Ex features a custom set up display, 1, 2 or 3 lines / measurement channels, easy to configure for the individual task

This table shows the resolutions that can be obtained by the HPC calibrators throughout all engineering units.

<b>HPC550Ex/HPC552Ex Ranges and Overpressure Ratings</b>													
<b>BAR</b>													
Range (bar)	25mbar	70mbar	350mbar	1	1.1	2	7	20	35	70	200	350	700
Burst pressure (bar)	200mbar	650mbar	1	6	6	6	70	133	133	700	700	700	1000
Proof pressure (bar)	70mbar	200mbar	650mbar	4	4	4	13	40	70	200	400	700	1000
Static pressure (bar)	70mbar	7	7	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
<b>PSI</b>													
Range (psi)	0.4	1	5	15	16	30	100	300	500	1000	3000	5000	10000
Burst pressure (psi)	3	10	15	90	90	90	1000	2000	2000	10000	10000	10000	15000
Proof pressure (psi)	1	3	10	30	30	60	200	600	1000	3000	6000	10000	15000
Static pressure (psi)	1	100	100	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
<b>HPC550Ex/HPC552Ex Resolutions</b>													
psi	0.4000	1.0000	5.0000	15.000	16.000	30.000	100.00	300.00	500.00	1000.00	3000.00	5000.00	10000.00
bar	0.0276	0.0689	0.3447	1.0342	1.1032	2.0684	6.8948	20.684	34.474	68.948	206.84	344.74	689.48
mbar	27.579	68.948	344.74	1034.2	1103.2	2068.4	6894.8	20684	34474	68948	n/a	n/a	n/a
kPa	2.7579	6.8948	34.474	103.42	110.32	206.84	689.48	2068.4	3447.4	6894.8	20684	34474	68948
MPa	0.0028	0.0069	0.0345	0.1034	0.1103	0.2068	0.6895	2.0684	3.4474	6.8948	20.684	34.474	68.948
kg/cm <sup>2</sup>	0.0281	0.0703	0.3515	1.0546	1.1249	2.1092	7.0307	21.092	35.153	70.307	210.92	351.53	703.07
cmH <sub>2</sub> O@4°C	28.124	70.309	351.54	1054.6	1124.9	2109.3	7030.9	21093	35154	70309	n/a	n/a	n/a
cmH <sub>2</sub> O@20°C	28.173	70.434	352.17	1056.5	1126.9	2113.0	7043.4	21130	35217	70434	n/a	n/a	n/a
mmH <sub>2</sub> O@4°C	281.24	703.09	3515.4	10546	11249	21093	70309	n/a	n/a	n/a	n/a	n/a	n/a
mmH <sub>2</sub> O@20°C	281.73	704.34	3521.7	10565	11269	21130	70434	n/a	n/a	n/a	n/a	n/a	n/a
inH <sub>2</sub> O@4°C	11.072	27.681	138.40	415.21	442.89	830.42	2768.1	8304.2	13840	27681	83042	n/a	n/a
inH <sub>2</sub> O@20°C	11.092	27.730	138.65	415.95	443.68	831.89	2773.0	8318.9	13865	27730	83189	n/a	n/a
inH <sub>2</sub> O@60°F	11.083	27.708	138.54	415.61	443.32	831.23	2770.8	8312.3	13854	27708	83123	n/a	n/a
mmHg@0°C	20.686	51.715	258.58	775.73	827.44	1551.5	5171.5	15515	25858	51715	n/a	n/a	n/a
inHg@0°C	0.8144	2.0360	10.108	30.540	32.576	61.081	203.60	610.81	1018.0	2036.0	6108.1	10180	20360

- Proof pressure - maximum allowable pressure without a shift in calibration.
- Burst pressure - sensor damaged or destroyed, some risk of personal injury.
- Static pressure - differential units only. Maximum allowed common mode pressure between both points.
- Compound ranges - the data for the 1 bar range also applies to the -1 to +1 bar compound range, the data for the 2 bar range also applies to the -1 to +2 bar compound range.
- Absolute ranges - the data for the 1.1, 2, 7 and 20 bar ranges also applies to the absolute pressure versions of those ranges.

**STANDARD DELIVERY (HPC Calibrator)**

- HPC550Ex or HPC552Ex calibrator
- Traceable calibration certificate (NIST) with pressure and vacuum performance
- 4 x 1.5 volt batteries
- Test leads: red and black
- User manual



**ORDERING INFORMATION**

Order number	Description
HPC	Type
550	Model
	Pressure range
25MD	±25 mbar / 0.35 psi differential
70MD	±70 mbar / 1 psi differential
350MD	±350 mbar / 5 psi differential
001A	0.025 to 1.1 bar / 16 psi absolute
001C	-0.96 to 1 bar / 15 psi gauge/compound
002A	0.025 to 2 bar / 30 psi absolute
002C	-0.96 to 2 bar / 30 psi gauge/compound
007A	0.070 to 7 bar / 100 psi absolute
007C	-0.82 to 7 bar / 100 psi gauge/compound
020A	0.070 to 20 bar / 290 psi absolute
020C	-0.82 to 20 bar / 290 psi gauge/compound
035C	-0.82 to 35 bar / 500 psi gauge/compound
070G	0 to 70 bar / 1,000 psi gauge
200G	0 to 200 bar / 2,900 psi gauge
350G	0 to 350 bar / 5,000 psi gauge
700G	0 to 700 bar / 10,000 psi gauge
	Calibration certificate
G	NIST traceable calibration certificate
	Accessories (Optional)
C	Soft case (Not to be used in hazardous areas)
T	Temperature sensor Pt100
	Pressure system
IND	Calibrator only
	Sample order number
HPC 550 035C G CT IND	HPC550, -0.82 to 35 bar, NIST traceable certificate, soft case, temperature sensor, calibrator only

**ORDERING INFORMATION**

Order number		Description					
HPC		Type					
552		Model					
Port 1	Port 2	Pressure range (Port 1 - lowest pressure, Port 2 - highest pressure)					
001A	001A	0.025 to 1.1 bar / 16 psi absolute					
001C	001C	-0.96 to 1 bar / 15 psi gauge/compound					
002A	002A	0.025 to 2 bar /30 psi absolute					
002C	002C	-0.96 to 2 bar / 30 psi gauge/compound					
007A	007A	0.070 to 7 bar / 100 psi absolute					
007C	007C	-0.82 to 7 bar / 100 psi gauge/compound					
020A	020A	0.070 to 20 bar / 290 psi absolute					
020C	020C	-0.82 to 20 bar / 290 psi gauge/compound					
035C	035C	-0.82 to 35 bar / 500 psi gauge/compound					
070G	070G	0 to 70 bar / 1,000 psi gauge					
200G	200G	0 to 200 bar / 2,900 psi gauge					
350G	350G	0 to 350 bar / 5,000 psi gauge					
700G	700G	0 to 700 bar / 10,000 psi gauge					
		Calibration certificate					
		G	NIST traceable calibration certificate				
		Accessories (Optional)					
		C	Soft case (Not to be used in hazardous areas)				
		T	Temperature sensor Pt100				
		Pressure system					
		IND	Calibrator only				
		Sample order number					
HPC	552	035C	350G	G	CT	IND	HPC552, port 1: -0.82 to 35 bar, port 2: 0 to 350 bar, NIST traceable certificate, soft case, temperature sensor, calibrator only

## ACCESSORIES

### Useful soft case - Option C

#### *Not to be used in hazardous areas!*

The HPC550Ex can be delivered with a soft case as an option. The handy soft case is designed for protection during transport. The soft case has separate compartments for HPC550Ex (w/Velcro strap), test leads, test hoses, temperature probe, and JOFRA APM pressure module. A shoulder strap ensures convenient transportation when climbing ladders, etc. and the handy strap on the back makes it possible to hang the instrument on a valve, ladder etc. The manual and calibration documents fit into a pocket on the front of the soft case.

### Temperature sensor - Option T

To utilize the thermometer utility of the HPC550Ex family, a ruggedized handheld temperature sensor is available. The sensor comes as a ready-to-use probe with handle and coiled cable with LEMO connector for HPC550Ex and HPC552Ex. The sensor is built with a high accuracy Pt100 element, accuracy  $\pm 0.05^{\circ}\text{C}$  /  $\pm 0.27^{\circ}\text{F}$ . Sensor dimensions, without handle and cable,  $\varnothing$  4x200 mm/stainless steel.



AMETEK Test & Calibration Instruments  
A business unit of AMETEK Measurement & Calibration  
Technologies Division offering the following industry  
leading brands for test and calibration instrumentation.

JOFRA Calibration Instruments  
Temperature Calibrators  
Portable dry-block calibrators, precision thermometers  
and liquid baths. Temperature ranges from  
 $-90^{\circ}\text{C}$  ( $-130^{\circ}\text{F}$ ) to  $1205^{\circ}\text{C}$  ( $2200^{\circ}\text{F}$ ). Temperature sensors  
for industrial and marine use.  
Pressure Calibrators  
Convenient electronic systems ranging from  $-25$  mbar to  
1000 bar - fully temperature-compensated for problem-  
free and accurate field use.  
Signal Instruments  
Process signal measurement and simulation for easy  
control loop calibration and measurement tasks.

M&G Pressure Testers & Pumps  
Pneumatic floating-ball or hydraulic piston dead weight  
testers with accuracies to 0.015% of reading. Pressure  
generators delivering up to 1,000 bar.

Lloyd Instruments  
Materials testing machines and software from Lloyd  
Instruments guarantees expert materials testing  
solutions. The comprehensive program also covers  
Texture Analysers to perform rapid, general food testing  
and detailed texture analysis on a diverse range of foods  
and cosmetics.

Davenport Polymer Test Equipment  
Allows measurement and characterization of moisture-  
sensitive PET polymers and polymer density.

Chatillon Force Measurement  
The hand held force gauges and motorized testers  
have earned their reputation for quality, reliability and  
accuracy and they represent the de facto standard for  
force measurement.

Newage Testing Instruments  
Hardness testers, durometers, optical systems and  
software for data acquisition and analysis.



*The Right Source For Your Test & Measurement Needs*

2222 Verus Street Suite C San Diego CA 92154 USA  
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012  
Email: sales@calright.com <http://www.calright.com>