

Switching DC Power Supply with USB Charger

Output 1-36 V, 0-3 A

Model 1550



The model 1550 is a compact 108 watt power supply delivering 1-36 V and 0-3 A from its main isolated output. A unique feature of the 1550 supply is the USB charging port located on the front panel allowing the user to charge a cell phone or MP3 player. Clean power and quiet operation make this power supply ideal for any bench in laboratories, work shops and schools where bench space is limited.

Features:

- USB charging port on front panel
- Rear panel security loop
- Compact design
- Output On/Off control
- Large bright easy to read LCD display
- Constant voltage and constant current operation
- Overvoltage protection
- 230 Vac European version with Banana style outputs, order model 1550EXD



USB Charging Port

Charge your cell phone or MP3 player while you work



Specifications

model

1550

MAIN OUTPUT

Output Voltage Adjustable Range	1.0 – 36 VDC
Output Current Adjustable Range	0 – 3 A
Voltage Regulation	
Load from 10 % to 100 %	±50 mV
Line from min to max	±20 mV
Ripple (rms)	±5 mV
Noise (Peak to Peak)	±50 mV
Current Regulation	
Load from 10 % to 100 %	±20 mA
Line from min to max	±20 mA
Switching Operation Frequency	80 kHz to 120 kHz
Efficiency at Max Power	83 % (±10 %)
Voltmeter and Ammeter Display	3 Digit
Voltmeter Accuracy	±1 % of rdg. ± 5 digits
Ammeter Accuracy	±1 % of rdg. ± 5 digits

USB OUTPUT

Output Voltage	5 V (±10 %)
Output Current	400 mA (±10 %)
Load Voltage Regulation	80 mV (±10 %)
Ripple & Noise (no load rms)	8 mV (±10 %)

GENERAL

Input Voltage	100 – 120 Vac (50–60 Hz) For 230V input version order model number 1550EXD
Full Load Input Current at 120 Vac	1.8 A (±10 %)
LCD Indication	CC, CV, Amp, Volt, Output ON-OFF
Protection	Short Circuit, Overload, Over Temperature, Over Voltage
Cooling System	Natural Convection
Dimensions (WxHxD)	2.8" x 6.0" x 9.8" (70 x 150 x 250 mm)
Weight	4.4 Lbs. (2 kgs)


One Year Warranty

Accessories

Supplied: User Manual, Power Cord

Rear Panel Security Loop

Secure the power supply to a work station to prevent unwanted removal

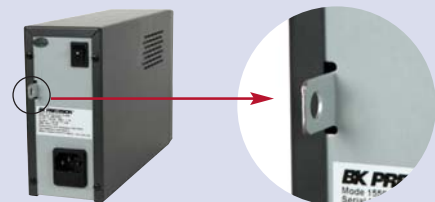

Technical data subject to change
© B&K Precision Corp. 2011
v122111

www.bkprecision.com



CALRIGHT INSTRUMENTS

The Right Source For Your Test & Measurement Needs

8715 Mesa Point Terrace San Diego, CA 92154
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012
Email: sales@calright.com <http://www.calright.com>