

nVision Reference Recorder







LED icons indicate recording status and overpressure.

BARO Option—Switch between absolute and gauge pressure.



Ultra-Low Power Mode:
60 days of operation on 4 AA batteries.

Submersible in 1 meter

of water for 30 minutes.



10000 PSI

8715 Mesa Int Terrace San Diego, CA 92154 Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012

IP67

The Right Source For Your Test & Measurement Needs Email: sales@calright.com http://www.calright.com

1999

Pressure Temperature & Current








Measure, calibrate, and record up to 15 000 psi with up to 0.025% of reading accuracy, in the field.





Works with 2-, 3-, and 4-wire Pt100 RTDs. Includes an IP67 rated, M8 connector terminal block.





Measures 4-20 mA and 10-50 mA loops, DC voltage, and switch state. Each MA20 module comes with a super flexible, silicone 2mm test lead kit.



Modular Configuration

nVision modules put a complete test and calibration system in your toolbox.



Pressure + Pressure




Record two pressure inputs for up to 8 weeks, and low wet-wet differentials at up to 15 000 PSI static pressure.

Well Optimization // Hydraulic Fracturing //
Artificial Lift // Christmas Tree // Pump Testing



Pressure + Temperature





Hydrostatic // Pressure Vessel Testing



Pressure + Current





Documented Switch Testing // Pressure Transmitter Calibration





U.S. Patent No. 8,794,677

- Purpose-designed for testing & calibration
- Self-venting weep hole alerts you before you disconnect from a pressurized system
- Shifts everyday thread wear to a replaceable adapter fitting
- ➤ 2 seals: Use fingers for an o-ring seal or use a wrench for a metal to metal cone seal, down to -40°C
- For more information about CPF visit crystalengineering.net/cpf

FITTINGS FOR LIFE





Lab Accuracy in the Field

Active Temperature Compensation



Count on the same accuracy at any temperature, between -20 and 50°C.

RUGGEDNESS & High Accuracy

\$250,000 Saved in 6 Months

Before nVision, I had no way of testing my filters. I was replacing them every few months without knowing if I needed to.

Now, I test my filters at full line pressure and replace them only when necessary. Using nVision, we saved \$250,000

within the first six months. We also had documentation to show concerned clients our filters were performing as expected.

We are now using nVision units to outfit our main compressor stations, track our general pipeline maintenance, and document our custody transfer activities.



Calibrate with Confidence Anywhere



Take measurements with up to 0.025% of reading accuracy. Certified by our A2LA/ILAC accredited calibration laboratory.

Accurate Low Differentials



at High Static Pressure

No risk of sensor damage, at full static pressure, using high-accuracy differential mode.



Visualize Your Data

See Changes As You Record

AMETEK


nVision Reference Recorder

872.2 PSI 18-Jun-10 09


Skip the trip back to the lab. Examine your data in the field while you record your test.


Zoom and Pan Across Data

Take a closer look. Use the arrow keys to inspect the details of your last data run.



Original View





Multiple Data Views

View data from each module separately, or combine the data from both modules into one graph.







Crystal Control



Your Device, Your Way

Customize, secure, and configure your nVision with CrystalControl software. Access, view, and export your data with DataViewer.

- Customizable Screens Sort, enable, and assign numbers to screens to match the way you work.
- Custom Units Disable the units you do not need and define a custom unit for your application.
- Prompt users to acknowledge a custom safety message with the press of a button, before using the nVision.
- ➤ Tamper-Proof Digital Records

 Securely export your digital ————
 recording directly into an industrystandard, signed PDF.
- Record Start nVision recordings directly from your PC.




CrystalControl software is available as a free download at

CrystalEngineering.net/nVision

DataViewer

Graph & zoom in on any data run. Format your graph, then export to a signed or unsigned PDF, CSV, or Excel file.

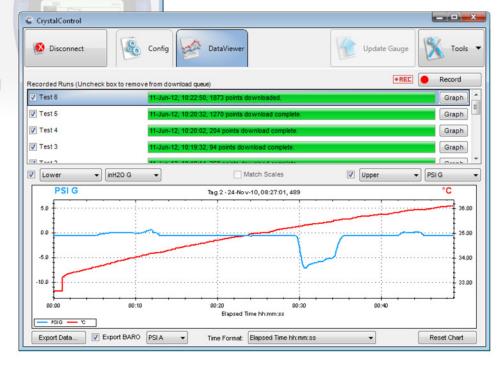



Applications

Differential Pressure Gauge and Recorder



Orifice Plate

Measure and record low differentials at high static pressure directly across an orifice plate.



Filter Testing

Save money by testing filters for clogs and wear, before replacing them.



Differential Transmitters

Calibrate and validate a differential transmitter in the field.



Rotary Gas Meters

Testing a fluctuating input—like a rotary gas meter— is easy. nVision's dampening window stabilizes unstable readings.

Calibration and Test Tool



Custody Transfer

Field calibrate the high-accuracy equipment used in commercial transactions.



PRV, PSV, and Burst Discs

Capture and record relief valve seat and reseat pressure at 10 readings per second.



Deadweight Tester Replacement


Carry the accuracy of a deadweight tester anywhere you go.



Calibration and Maintenance

The nVision offers special test modes for quick, easy verification and in-field calibration with no special training.

Chart Recorder Replacement



nVision replaces chart recorders with higher accuracy in a smaller, lighter, more rugged package, while saving data in a secure electronic format.





8715 Mesa Point Terrace San Diego, CA 92154

Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012

Email: sales@calright.com http://www.calright.com



Dear Pressure Gauge User,

At Crystal Engineering we believe perfection is possible. We hold in mind our mission to produce the products that make your work easier. nVision started with you—our customers—with your ideas, your phone calls, your requests for features. You told us what you needed. We built what you asked for.

The device we designed is task configurable, with two module ports, extensive data capacity, and intuitive controls.

We created sensor modules with lightning fast read rates and added Crystal's proprietary temperature compensation algorithms. We protected them against rough handling, over-pressure, and caustic chemicals. We made it easy to change modules in the field, so you can switch configurations and keep working.

Our final product? The industry's first Reference Recorder: as accurate as a deadweight tester—more portable than a chart recorder—and ruggedized for year-round service on a North Sea oil platform.

The nVision earned its name from its best feature. During or after a test, nVision graphs your latest recorded data on the LCD screen. Zoom in, pan across, and download data, even while you record. Then, use CrystalControl's DataViewer to prepare your report and export to a Tamper-Proof Digital Record.

One nVision does the work of many other tools. Carry it with you every day, or leave it on location for up to 60 days.

We take pride in all our products, and we believe the nVision is our finest yet. Contact us today for a demonstration unit. Use it once and we guarantee you won't want to return it.

Sincerely,

The Crystal Team

Safe & Reliable in Hazardous Environments



ᇊ II 1G Ex ia IIB T4 Ga -or- Ex ia IIB T3 Ga

 $Ta = -20 \text{ to } 50^{\circ}\text{C} \text{ or } -20 \text{ to } 45^{\circ}\text{C} \text{ (depending on type of approved battery used)}$



SIRA 09 ATEX 2008 X

This product conforms to the following standards:

EN60079-0: 2006 | EN60079-11: 2007 | EN60079-26: 2007



This product conforms to the following standards:

IEC 60079-0: 2004 | IEC 60079-11: 2006 | EN60079-26: 2006











Crystal products include a factory calibration report that proves it meets its specifications over the operating temperature range. The products described herein, are calibrated in Crystal's accredited Calibration Lab (A2LA, Certificate #2601.01 ISO/IEC 17025) in an environmental chamber using fully automated equipment. Inclusion of the ILAC-MRA symbol does not imply certification or approval of the product itself, but rather refers to Crystal's accreditation as a calibration facility

