

# 3-Phase Power Analyzer/Datalogger


**Saves data on an SD card in Excel<sup>®</sup> format**  
For easy transfer to a PC for analysis

## Features:

- Large dot-matrix, sun-readable, numerical, backlit LCD
- Full system analysis with up to 35 parameters
  - V (phase-to-phase), V (phase-to-ground)
  - A (phase-to-ground)
  - KW / KVA / KVAR / PF (phase)
  - KW / KVA / KVAR / PF (system)
  - KWH / KVAH / KVARH / PFH (system)
  - Phase angle
- Optional 200A, 1200A Current Clamps or 3000A Flexible Current Probes
- Adjustable Current Transformer CT (1 to 600) and Potential Transformer PT (1 to 1000) ratio for high power distribution systems
- Log up to 30,000 reading on a removable SD memory card in Microsoft Excel<sup>®</sup> format
- Wide sampling rate range (2 seconds to 2 hours)
- Built-in Clock and Calendar
- Easy-to-use onscreen menu
- Easy-to-hold rugged over molded housing



Backlit LCD displays numerical values. The data can be stored in SD memory card (included) and then transferred from meter to PC using Excel<sup>®</sup> software and datalogged readings.

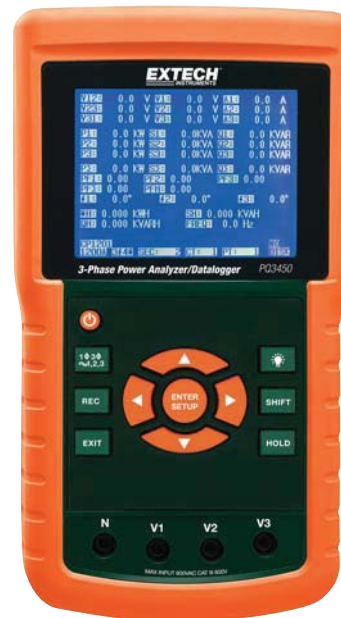

Complete with meter, 4 voltage leads with alligator clips, 8 AA batteries, SD memory card, Universal AC adaptor (100 to 240V), and durable hard carrying case. Clamp probes sold separately.

## Optional Clamp Probes

Choose the best clamp probes to fit your application needs ranging from 200A to 3000A and flexible vs traditional jaw type.



**Model PQ34-2**  
200A Current Clamp Probes with 0.8" (19mm) jaw opening



**Model PQ34-12**  
1200A Current Clamp Probes with 2" (50mm) jaw opening



**Model PQ34-30**  
3000A (24"/600mm) Flexible Current Clamp Probes for wrapping around busbars

## Ordering Information:

- PQ3450.....3-Phase Power Analyzer/Datalogger
- PQ34-2.....200A Current Clamp Probes (set of 3)
- PQ34-12.....1200A Current Clamp Probes (set of 3)
- PQ34-30.....3000A Flexible Current Clamp Probes (set of 3)
- PQ1000.....Voltage Test Leads with Alligator Clips (4 leads)



The Right Source For Your Test & Measurement Needs

Specifications	Range	Basic Accuracy
ACV (True rms)	600.0V	±(0.5%rdg+0.5V)
ACA	1200A	±(0.5%rdg+0.5A)
Active Power (MW)	9.999MW	±(1.0%rdg+0.008MW)
Apparent Power (MVA)	9.999MVA	±(1.0%rdg+0.008MVA)
Reactive Power (MVAR)	9.999MVAR	±(1.0%rdg+0.008MVAR)
Power Factor	0.00 to 1.00	±0.04
Frequency Range	45Hz to 65Hz	±0.1Hz
Phase	-180° to +180.0°	±1°
Current Clamp input	200mV, 300mV, 500mV 1V, 2V, 3V; user-selectable	±(0.5%rdg+5d)
Active Power Energy (MWH)	0.0KWh to 9.999MWH	±(2.0%rdg+0.008MWH)
Apparent Power Energy (MVAH)	0.0KVAh to 9.999MVAH	±(2.0%rdg+0.008MVAH)
Reactive Power Energy (MVARH)	0.0KVARh to 9.999MVARH	±(2.0%rdg+0.008MVARH)
Datalogging	30,000 readings (2GB SD memory Card)	
CE/CAT rating	CE/CAT III-600V	
Dimensions	8.86 x 4.92 x 2.52" (225 x 125 x 64mm)	
Weight	Meter: 2.2lbs (1010g)	

8715 Mesa Point Terrace San Diego, CA 92154  
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012  
Email: sales@calright.com <http://www.calright.com>