

TT Series Torque Tool Tester

The TT Digital Torque Tool Tester is a simple operation test instrument for quickly checking torque tool performance. The TT Series provides exceptional accuracy for measuring torque on various products including torque wrenches, manual screwdrivers, electric screwdrivers, pneumatic screwdrivers and other torque controlled power tools.

The TT's provide long operation life and power flexibility with the ability to work from the internal rechargeable battery or included AC adapter. The TT's have four modes of operation: Track for live readings, Peak which records the highest level over a test, First Peak which records the first peak reading over the test and Track/Peak which shows both the live readings as well as the peak reading recorded.

The backlit display provides an analog bar graph on screen to allow the user to know where the resultant torque is currently positioned compared to the full scale range of the unit. CW/CCW icons along with programmable pass/fail LED's (HI/OK/LO) assist users with ensuring proper test set up along with enabling a quick determination of the results.

Every tester comes standard with USB and RS-232 output. The TT's software enables the uploading of data and the additional statistical analysis with its auto-calculation of the selected values.

These excellent features make the TT Torque Tool Testers a valuable and versatile addition to the production and quality control departments.



**TT with Included
Accessories and Carry Case**

Features

- Strong, light-weight, compact aluminum enclosure allows portability and usage in any shop environment.
- Flexible four modes of operation: Track, Peak, First Peak & Track/Peak
- High-resolution, backlit graphical display with analog bar graph and CW/CCW direction indication provides fast graphical interpretation of tool response.
- Pass-Fail LED light indicators enable quick determination of tool performance acceptance.
- Units come standard with USB or RS232 communication output for data upload.
- 500 memory record storage plus software provides easy data transfer.
- 0.5% accuracy of full scale range provides sufficient standard for checking tools.
- May be operated using the rechargeable battery or with the AC adapter.
- Included rundown adapter for power tool testing
- Calibration certificate with data guarantees performance upon purchase.



TT Series Specifications

Accuracy	± 0.5 % of full-scale.(Includes Creep, Non-linearity & Temperature Shift at zero load)
Units of Measure	N-mm, N-cm, N-m, in-lb, ft-lb, kg-cm, kg-m (depending on range)
Measure Modes	Track, Peak, First-Peak, Track/Peak
Tool Socket Size	Dual 3/8", 20 mm female square.
Overload Protection	120% of Full Scale
Max. Mounting Torque	150% of Full Scale
Sampling Rate	1000 Hz
Peak Capture Rate	0.10 S
Display	175 x 1.125" (44.4 x 28.6 mm) dot matrix backlit LCD
Operating Temperature	60 - 95 °F (15 - 35 °C)
Storage Temperature	5 - 149 °F (-15 to 65 °C)
Humidity Limit	Maximum 70% rH.
Power Requirement	500 mA 9 VDC
Charging Time	Approx. 14-16 Hours for Full Charge
Battery Operation	12 Hours
Output	USB 8 data bits Baud rate: 38400
Communication Ports	Both RS232 & USB simultaneous output
Size	4 x 8 x 2" (100 x 200 x 50 mm); TT-25: 4 x 9.8 x 2.3" (100 x 250 x 58 mm)
Product Weight	2.4 lb (0.9 kg); TT-25: 4.9 lb (2.22 kg)
Package Weight	5.1 lb (2.3 kg); TT-25: 7.7 lb (3.49 kg)
Warranty	1 year
Included Accessories	USB cable, charger adapter, cal. cert., 3/8" Hex rundown adapter (1, 5 & 10 N-m ranges only).
Optional Accessories	RS-232 cable, Rundown adapter springs, Rundown adapters Note: Software available for free download at www.shimpoinst.com

Ordering Details

Range by unit (Resolution)					
Model	N-m	kgf-cm	kgf-m	in-lbf	ft-lbf
TT-0.5	0.5 (0.0001)	5.099 (0.001)	0.0509 (0.0001)	4.425 (0.001)	0.3687 (0.0001)
TT-1	1 (0.0002)	10.2 (0.002)	0.1020 (0.0001)	8.850 (0.002)	0.7375 (0.0002)
TT-5	5 (0.001)	50.99 (0.01)	0.5099 (0.0001)	44.25 (0.01)	3.687 (0.001)
TT-10	10 (0.002)	102 (0.02)	1.02 (0.0002)	88.50 (0.02)	7.375 (0.002)
TT-25	25 (0.002)	254.9 (0.05)	2.549 (0.0005)	221.3 (0.05)	18.44 (0.005)

DISTRIBUTED BY:

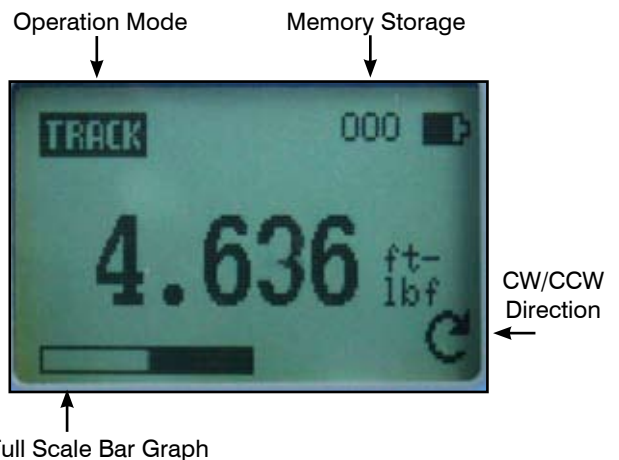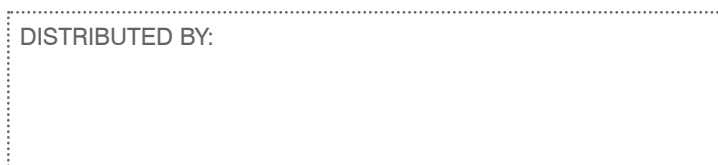

CALRIGHT INSTRUMENTS

The Right Source For Your Test & Measurement Needs

2222 Verus Street Suite C San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
 Email: sales@calright.com <http://www.calright.com>