



Class 2 Sound Level Meter

with Excel-Formatted Data Logging SD Card

Accurately Measures Sound Levels of Machinery or an Environment with 0.1 dB Resolution




No. DSM402SD

Applications:

- Noise pollution control
- OSHA noise regulatory compliance
- Acoustics design



Noise Pollution Control

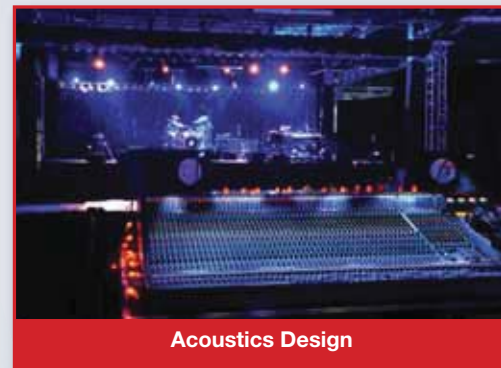

Acoustics Design

8715 Mesa Point Terrace San Diego, CA 92154
 Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012
 Email: sales@calright.com http://www.calright.com

CALRIGHT INSTRUMENTS
 The Right Source For Your Test & Measurement Needs

This instrument's unique feature is its patented technique for storing sampled data in Excel format on removable SD memory cards



Patented Technology

	A	B	C	D	E
1	Place	Date	Time	Value	Unit
2	1	2009/10/16	16:47:05	60.8	dB
3	2	2009/10/16	16:47:07	66.9	dB
4	3	2009/10/16	16:47:09	68.8	dB
5	4	2009/10/16	16:47:11	71	dB
6	5	2009/10/16	16:47:13	82.3	dB
7	6	2009/10/16	16:47:15	92.3	dB
8	7	2009/10/16	16:47:17	93.1	dB
9	8	2009/10/16	16:47:19	93.1	dB
10	9	2009/10/16	16:47:21	89.8	dB
11	10	2009/10/16	16:47:23	90.2	dB

Typical Excel Data



Typical Excel Plotted Data



Class 2 Sound Level Meter with Excel-Formatted Data Logging SD Card

Features:

- Measures sound levels of machinery or an environment
- Big (2.5 in. diagonal) front-panel green backlit LCD is easy to read
- Makes measurements in auto ranging mode or within a manually settable range
- Displays maximum and minimum readings and holds any reading
- Performs automatic data logging at sampling time settable from 1 second to 9 hours
- Also supports manual logging and changing of card storage location
- Auto power off function

Included Accessories:

- Hard carrying case
- Sound wind shield ball
- 2 GB SD memory card
- User's manual

Optional Accessories:

- 9VDC adapter for 110V power supply (General P/N AC1)
- SDRD1 - SD Card Reader



No. DSM402SD

Specifications:

Embedded Microcontroller: Custom one-chip LSI device

Display Type: LCD with green backlight

Display Size: 2.05 x 1.5 in. (52 x 38 mm)

Parameter Measured: dB

Frequency Range: 31.5 Hz to 8 kHz

Measurement Range:

- 30 to 130 dB in auto ranging mode
- User can also select fixed range of 30 to 80 dB, 50 to 100 dB, or 80 to 130 dB

Measurement Weighting:

- By frequency: frequency weighing uses "A" or "C" standard
- By time: time weighting is fast or slow (200 ms or 500 ms response time)

Measurement Accuracy:

- With "A" frequency weighting: ± 3.5 dB @ 31.5 Hz, 2.5 dB @ 63 Hz, 2 dB @ 125 Hz, 1.9 dB @ 250 Hz, 1.9 dB @ 500 Hz, 1.4 dB @ 1 kHz, 2.6 dB @ 2 kHz, 3.6 dB @ 4 kHz, 5.6 dB @ 8 kHz

Measurement Resolution: 0.1 dB

Data Logging Sampling Time: 1 second to 1 hour

Settable Parameters: Date, time, auto power off, beep sound, sampling time, decimal point or comma decimal division, "A" or "C" frequency weighting, fast or slow time weighting

Storable/Recallable Readings: Maximum, minimum

SD Card Capacity: 1 GB to 16 GB

Operating Temperature: 32° to 122°F (0° to 50°C)

Operating Relative Humidity: 0 to 85%

Power Consumption:

- 8 mADC (normal operation, with backlight off and SD card not saving data)
- 30 mADC with backlight on and card saving data
- 44 mADC with backlight on and card saving data

Dimensions of Meter:

9.65 x 2.68 x 1.77 in. (245 x 68 x 45mm)

Weight of Meter: 1.08 lb. (489g)

Power Source:

Six "AA" batteries or optional 9-VDC AC adapter



General Tools & Instruments

80 White Street, New York, NY 10013-3567
TEL: 212.431.6100 TOLL FREE: 800.697.8665
sales@generaltools.com www.generaltools.com

CALRIGHT
INSTRUMENTS

The Right Source For Your Test & Measurement Needs

8715 Mesa Point Terrace San Diego, CA 92154
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012
Email: sales@calright.com <http://www.calright.com>