

3540 m Ω HiTESTER

Component measuring instruments



Customize with BCD output, printer interface or RS-232C interface to suit your application needs.

Fast-response milliohmmeter offers selectable manual measurement or system integration.

The 3540 m Ω HiTESTER is a high performance low resistance tester that includes a comparator function essential for component sorting, fast 16-times-per-second sampling, temperature compensation and auto-ranging, and a choice of interfaces to meet your measurement needs.

The standard 3540 is the economical version without external control interfaces, making it the no-fuss solution for manual testing.

For more advanced system integration capabilities, select Model 3540-01 for a built-in BCD output interface providing for external control, Model 3540-02 to output measurement results to a printer, and Model 3540-03 to add PC compatibility via a built-in RS-232C interface.



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091

1 Internal Comparator with Fast 100-ms Response

Features

- Comparator function stores up to seven tables
- Dual comparator modes: Hi-Lo compares upper and lower limits, and REF-% compares a range and standard value
- Fast response of about 100 ms (measuring pure resistance: actual response depends on material under test)
- Temperature compensation function measures temperature and calculates value relative to copper at 20°C/68°F
- 4-terminal method eliminates the effects of leads and contact resistance
- Auto-ranging function
- Dual power system: batteries or AC adapter
- BCD, printer interface and RS-232C interface options in -01, -02 and -03 suffix versions, respectively



Main Buttons



*All display segments shown lit for purposes of illustration.

1. Range Select, Auto-Range On/Off
2. Hold (also controllable by external trigger and EOC, besides displaying hold)
3. Temperature compensation On/Off or temperature display
4. Button lock
5. Comparator Table Select (Up to 7 states can be memorized)
6. Comparator Mode Select (Hi-Lo or REF-%)
7. Comparator Value Set (Upper/Lower limits or standard value/range settings)
8. Beeper Mode Select (HL, IN, OFF)
9. Comparator On/Off
10. Sampling Speed Select (Fast: 16 times/s, or Slow: 4 times/s)

Comparator Function

The comparator includes a Hi-Lo mode for setting upper and lower limits, and a REF-% mode for setting a standard value and range.

Up to seven tables can be memorized, each storing a measurement range, comparator mode and comparator values.

Hi/IN/Lo measurements are indicated by LED and 3-way beeper mode, and for the -01 and -02 versions, results are available for external use at open-collector output terminals on the rear panel.

Hi-Lo Comparator



Example display with FAST sampling, measurement value 30.00 mΩ, temperature compensation on, table no. 1, upper limit 30.10 and lower limit 29.90, and beeper mode HL.

REF-% Comparator




Example display with FAST sampling, 100.0% deviation of display from standard value (displayed deviation = measured value / standard value × 100%), temperature compensation function on, table no. 7, standard value is 30.00, range is ±10.0%, and beeper mode IN.

3540

The basic version includes the essential functions: eliminating external interfaces to keep the price low. Comparator results are displayed by LED and beeper. Jacks are provided on the

rear panel for the temperature probe (for temperature compensation), and for the AC adapter.

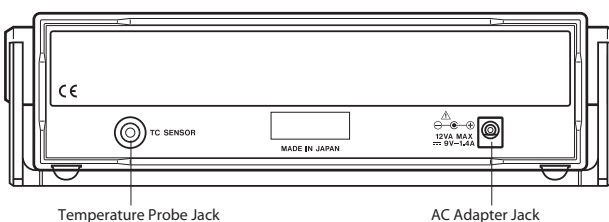

Temperature Probe Jack

AC Adapter Jack

Temperature Measurement Display



CALRIGHT INSTRUMENTS

The Right Source For Your Test & Measurement Needs

2232 Verus Street Suite D San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
Email: sales@calright.com <http://www.calright.com>


Ideal Interface for System Integration

3540-01

This version is equipped with a digital interface providing BCD output of comparator results and external control capability, as well as the essential functions of the 3540. Along with BCD output, the range, comparator tables, EOC and power can be externally controlled, ideal for system applications.


Timing Chart Example

The following chart shows the timing relationships between comparator results using the hold function and BCD output at the external connector.

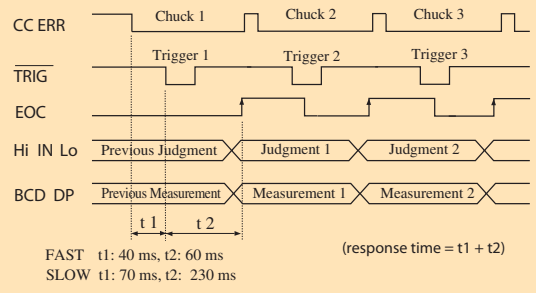


At Hold time, the EOC is retained until the next trigger to facilitate sequencing. Display and output are retained until the next EOC is taken.

CC ERR input enhances test reliability with various materials under test
 t1: (Settling time) after checking, the delay until measured power is stable before triggering. Settling time depends on material under test (value is relative to pure resistance).
 t2: (Measuring) raising EOC accepts BCD and comparator results, so the desired data is captured.

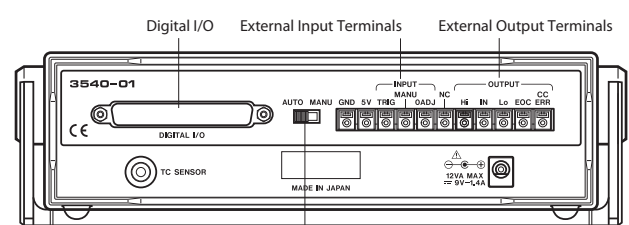

AUTO/MANU Select
 With AUTO selected, BCD and comparator results are output continuously. With MANU selected, comparator results are output only when the MANU and GND external input terminals are shorted together.

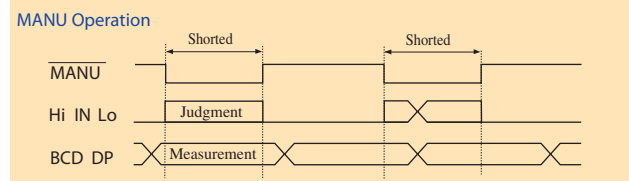


Digital I/O Details	External I/O
Outputs (TTL: 5V, 20 mA max.) <ul style="list-style-type: none"> BCD DP (range) signal End-Of-Check (EOC) signal Supply Current Error (CC ERR) signal 	Outputs (Open Collector: 35V, 50 mA max.) <ul style="list-style-type: none"> Comparator Result signal (Hi, IN, Lo) End-Of-Check (EOC) signal Supply Current Error (CC ERR) signal
Inputs (TTL: 5V, 20 mA max.) <ul style="list-style-type: none"> Range Select Comparator Table Select DC Power (+5V, 200 mA max.) GND 	Inputs (TTL: 5V, 20 mA max.) <ul style="list-style-type: none"> Trigger (TRIG) Manual (MANU) Zero Adjust (0 ADJ) Print (PRINT: only in version -02) DC Power (+5V, 200 mA max.) GND

Note: Signal Logic
 TTL Outputs: assert = 5V, negate = 0V
 TTL Inputs: assert = 0V, negate = 5V
 Open Collector Outputs: assert = ON, negate = OFF




EOC and CC ERR are output from version -01 by both TTL and open collector. Pin out details are available upon request.

3540-02

This version is equipped with a printer interface. The printer connector is provided along with the external I/O terminals of the -01 version, allowing printing by external request. The optional model 9203 DIGITAL PRINTER provides interval printing, statistical processing of maximum, minimum, average, standard deviation, histograms and graph printing. A standard printer with Centronics interface can also be connected.

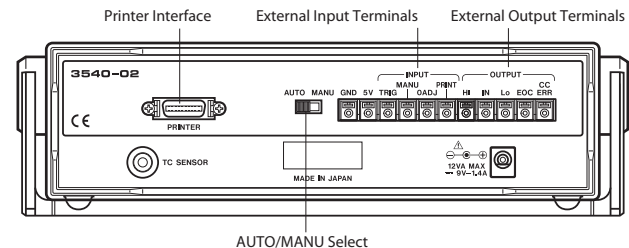

Printing Examples

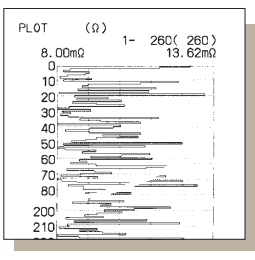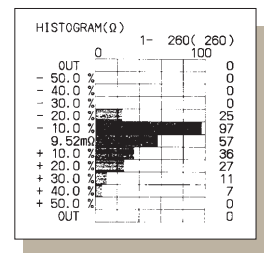

9203 DIGITAL PRINTER
 Printer type: Thermal Line Printer
 Statistical Processing (up to 99,999 data points)
 Histogram and graphics (up to 5,000 data points)
 Dimensions and mass: approx. 215W × 160H × 54D mm, 1 kg.
 Note: Please refer to the catalog for the 3550 Battery HITESTER series for further details.

Statistical Processing

Histogram

Graph Printing

3540-03

This model is equipped with an RS-232C interface, through which all features of the instrument other than the power supply can be controlled remotely. Measurement data can also be output through the interface for processing by various applications, increasing the scope of data utility.

RS-232C Specifications
 Transfer method : Synchronous transfer, full duplex.
 Transfer rate : 9600
 Data format : 8 data bits, no parity, 1 stop bit
 Handshaking : No support for X flow or hardware flow control
 Delimiter : CR or CR+LF during receive, CR+LF during send
 Connection cable : D-sub 9-pin female connector, reverse connection

3540 Specifications

Measurement method:	4-terminal direct current	Overvoltage Protection:	30V DC or AC peak (fuse protected)
Operating method:	double integration	Environment:	Operating temperature range: 0 to 40 °C (32°F to 104°F), less than 80% rh Storage temperature range: -10 to 50 °C (14°F to 122°F), less than 80% rh
Display:	LCD Resistance display digits up to 3500 Temperature digits up to 999	Power Supply:	Operating conditions: indoors, below 2,000 m (6,562 feet) altitude AA-size Alkaline batteries: type LR6 × 6 pcs, or AA-size Manganese batteries: type R6P × 6 pcs, or Model 9445 AC ADAPTER (9 V DC, 1.4 A) w/LR6 batteries: approx. 7 h (30 and 300 mΩ ranges) approx. 18 h (other ranges) w/R6P batteries: approx. 1.5 h (30 and 300 mΩ ranges) approx. 6 h (other ranges)
Auto-Ranging:	available (disabled with comparator ON)	Operating Time:	(with LED and Beeper on)
Input Overrange:	[OF] display	Maximum Rated Power:	5 VA
Current Fault:	[- - -] display (CC ERR external output in versions -01, -02 and -03)	Dimensions:	215W × 61H × 213D mm (8.5"W × 2.4"H × 8.4"D)
Sampling Rate:	Resistance measurement: SLOW 4 times/s, FAST 16 times/s	Mass:	3540 – Approx 900 g (2lbs), 3540-01 – Approx 1 kg (35.3 oz.)
Response Time:	Resistance measurement: SLOW 300 ms, FAST 100 ms Note: settling time depends on material under test (values are relative to pure resistance).	Accessories:	9287-10 CLIP TYPE LEADS (1), 9451 TEMPERATURE PROBE, Spare Fuse (1- F1.0 AH/250 V), Ferrite Clamp (2), External Connector Socket (*Ver.-01 only, HIROSE ELECTRIC INC. 37-pin plug / type FDCD-37P)
Temperature Compensation Function:	Standard Temperature 20 °C/68° F, Temperature Modulus: 3930 ppm/Cu wire	Conforming Standards:	EMC EN55011:1991+A2:1996 EN50082-1:1992 Safety EN61010-1:1993+A2:1995 EN61010-2-031:1994 Overvoltage category II (expected overvoltage 330V) Pollution degree 2
Comparator:	Comparator modes: selectable Hi-Lo or REF-% Comparator results are indicated by LED and beeper (selectable from HI/IN/OFF) Up to 7 table memories (external table selection only with version -01) External output (open collector: versions -01, -02 and -03 only)		
External Control:	TTL Output: BCD Open Collector Outputs: Hi, IN, Lo, EOC, CC ERR TTL Inputs: TRIG, MANU, 0 ADJ, range, comparator table select (-01 only), PRINT (-02 only)		
External Interface:	Centronics interface (-02 only), RS-232C interface (-03 only)		

Measurement Ranges

Conditions of guaranteed accuracy: 23 ± 5 °C/73 ± 9 °F less than 80% rh (non-condensating), after 30 min. warm-up, after zero adjustment.

Resistance Measurement: (sample rate: SLOW; for FAST, add 3 digits to the following digit tolerances)

Range	30 mΩ	300 mΩ	3 Ω	30 Ω	300 Ω	3 kΩ	30 kΩ
Resolution	10 μΩ	100 μΩ	1 mΩ	10 mΩ	100 mΩ	1 Ω	10 Ω
Measuring Current	100 mA		1 mA			10 μA	
Maximum Applied Voltage	3.5mV	35mV	3.5 mV	35 mV	350 mV	35 mV	350 mV
Accuracy	±0.1%rdg. ±6dgt.	±0.1%rdg. ±4dgt.	±0.1%rdg. ±6dgt.	±0.1%rdg. ±4dgt.			
Temperature Modulus	(±0.02%rdg. ±0.5dgt.)/°C (1.8°F)						
Open-Terminal Voltage	4.0 V max.						

Temperature Measurement/Compensation

Temperature Range	Temperature Measurement Accuracy	Accuracy of Temperature Compensation (add to resistance measurement accuracy)
-10.0 to 39.9°C (-14.0 to 103.8°F)	±0.3%rdg. ±0.5°C (0.9°F)	±0.3%
40.0 to 99.9°C (104 to 211.8°F)	±0.3%rdg. ±1.0°C (1.8°F)	±0.6%



9451 TEMPERATURE PROBE (included)

- 3540 mΩHiTESTER
- 3540-01 mΩHiTESTER (with BCD)
- 3540-02 mΩHiTESTER (with Printer interface)
- 3540-03 mΩHiTESTER (with RS-232C interface)

Optional accessories

- 9445-02 AC ADAPTER (universal 100 to 240VAC, 9V/1.4A output/for UL type)
- 9445-03 AC ADAPTER (universal 100 to 240VAC, 9V/1.4A output/for EU type)
- 9452 CLIP TYPE LEADS
- 9453 FOUR-TERMINAL LEADS
- 9455 PIN TYPE LEADS
- 9460 CLIP TYPE LEADS WITH TEMPERATURE SENSOR
- 9461 PIN TYPE LEADS
- 9467 LARGE CLIP TYPE LEADS
- 9770 PIN TYPE LEADS
- 9771 PIN TYPE LEADS
- 9637 RS-232C CABLE(9pin-9pin/Cross/1.8m)
- 9638 RS-232C CABLE(9pin-25pin/Cross/1.8m)
- 9203 DIGITAL PRINTER (for 3540-02)
- 9425 CONNECTION CORD (20-pin half-pitch—36pin/D-sub) [for connecting the 3540-02 to the 9203/2meters]
- 9233 RECORDING PAPER (for the 9203/10meters,10rolls)

9287-10 (included)

Approx. 85 cm between connectors, and 8 cm between probes

9452

Approx. 80 cm between connectors, and 20 cm between probes

9453

Approx. 80 cm between connectors, and 30 cm between probes

9455

same appearance as 9461
0.8 dia.
Current side
Voltage side
0.2/0.2 dia.

9460

Approx. 1.7 m between connectors, and 25 cm between probes

9461

Approx. 40 cm between connectors, and 25 cm between probes

9467

Approx. 85 cm between connectors, and 25 cm between probes, 29 mm dia.

9770/9771

Cable length: connector to fork 40cm, fork to probes 25cm

9770 -- in detail

0.6 mm dia.
1.8 mm dia.
2 mm

9771 -- in detail

0.2 mm
2.2 mm
2 mm

DISTRIBUTED BY



The Right Source For Your Test & Measurement Needs

2232 Verus Street Suite D San Diego CA 92154 USA
Toll Free: 866.363.6634 Tel: 619.429.4545 Fax: 619.374.7012
Email: sales@calright.com http://www.calright.com