

## High Gloss Meter IG-410



## Dual range checker for Gloss and Ultra High Gloss measurement

- **Latest model Gloss Checker now checks Ultra high gloss surface finishes**

The new IG-410 now measures ultra high gloss surfaces such as polished metal. The meter has ten times greater measurement range than the conventional model. Now even mirror finishes can be measured too.

- **Compact, lightweight and detachable probe design**

Weighing in at only 350g (1.3 lbs), this battery operated instrument is designed to be portable. Fast and reliable measurement by simple one-touch operation. LED light sources give <100,000 hours service so there is no need to exchange these parts due to lifetime.

- **Dual range extends measurement resolution in the low gloss range**

The IG-410 has two user-selectable measurement ranges, depending on the sample to be measured. Low gloss samples can be measured using the 0-100 range and high gloss samples can be measured using the 0-1000 range. Two calibration plates are provided to allow the user to follow a simple one-touch calibration procedure to ensure reproducible results.


## Specification

Measuring system	60°
Measuring area	3×6mm oval
Light source (Service life)	LED<890nm> (Indefinite)
Detector	SPD<890nm> (Silicon photodiode)
Measuring range (resolution)	range1 : 0.0~100.0 (0.1) range2 : 0~1000 (1)
Repeatability	±1% F.S.
Power source (Battery life)	R6(AA) Alkaline × 4 (200 hours or more at continuous operation)
Ambient temperature range	10-40°C
Dimensions	Main body : 75(W)×34(D)×140(H) mm 5.5(W)×3.0(D)×1.3(H) in  Optical system : 88(W)×30(D)×45(H) mm 3.5(W)×1.2(D)×1.8(H) in
Mass	Approx. 350g (including battery)
Additional functions	Automatic calibration Automatic power cut-off Overrange display Display hold
Accessories	Standard plate for range 100, 1000


## A measurement standard for the gloss value

Gloss value 100 is defined as specular reflectance in incident angle  $\theta$  of the glass of reflectance index 1.567. With incident angle  $\theta = 60^\circ$ , specular reflectance is 10%, or gloss value 100. Consequently gloss in specular reflectance 100% is calculated as 1000. Reflectance in many polished metals is 50% or more, some are 90% or more. Then measurement range is expanded up to 1000 in IG-410.


※ I adopt IR LED (an HORIBA original method) in a source of light.

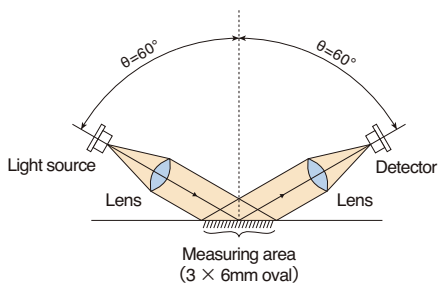


## Application

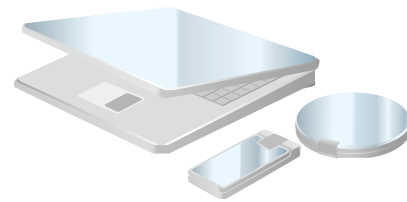

For external confirmation of plating product.



For finish confirmation of rolling metals.



For Research and Development of water polishing devices.

### Award of Certification

ISO 14001 JQA-E-90039 (Head Office/Factory)  
ISO 9001 JQA-0298

*Horiba continues contributing to the preservation of the global environment through analysis and measuring technology.*



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The contents of this catalog are subject to change without prior notice, and without any subsequent liability to this company.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

<http://www.horiba.com> e-mail: [info@horiba.co.jp](mailto:info@horiba.co.jp)

#### ● HORIBA, Ltd.

**Head Office**  
Miyano Higashi, Kisshoin  
Minami-ku, Kyoto, Japan  
Phone: 81 (75) 313-8123  
Fax: 81 (75) 321-5725

#### ● Tokyo Sales Office

1-7-8 Higashi-Kanda  
Chiyoda-ku, Tokyo, Japan  
Phone: 81 (3) 3861-8231  
Fax: 81 (3) 3861-8259

#### ● TAIWAN Representative Office

3F, NO.18 Lane 676, Chung  
Hua Rd, Chupei City,  
Hsinchu Hsien, 302, Taiwan  
Phone: 886 (3) 656-1012  
Fax: 886 (3) 656-8231

#### ● HORIBA TRADING (SHANGHAI) CO., Ltd.

**Shanghai Office**  
Room 1103, United Plaza,  
1468 Nanjing Rd. West,  
Shanghai, 200040, China  
Phone: 21-3222-1818  
Fax: 21-6289-5553

#### ● HORIBA KOREA Ltd.

112-6 Sogong-Dong  
Choong-ku, Seoul, Korea  
Phone: 82 (2) 753-7911  
Fax: 82 (2) 756-4972

#### ● HORIBA INSTRUMENTS Pte. LTD.

10 Ubi Crescent  
#05-11/12, Ubi Techpark  
Singapore 408564  
Phone: 65 6745-8300  
Fax: 65 6745-8155

#### ● HORIBA INSTRUMENTS INCORPORATED Irvine Facility

17671 Armstrong Avenue  
Irvine, CA 92614, U.S.A.  
Phone: 1 (949) 250-4811  
Fax: 1 (949) 250-0924

#### ● Ann Arbor Facility

5900 Hines Drive  
Ann Arbor, MI 48108  
U.S.A.  
Phone: 1 (734) 213-6555  
Fax: 1 (734) 213-6525

#### ● HORIBA / STEC INCORPORATED

1080 E. Duane, Suite. A  
Sunnyvale, CA 94086  
U.S.A.  
Phone: 1 (408) 730-4772  
Fax: 1 (408) 730-8975

#### ● HORIBA GmbH

A-3430 Tulln,  
Austria  
Phone: 43 (2272) 65225  
Fax: 43 (2272) 65230

#### ● HORIBA CZECHIA

Organizace slozka Praha  
Petrohradská 13  
CZ-101 00 Praha 10, Czech Republic  
Phone: 420 (2) 717-464-80  
Fax: 420 (2) 717-470-64

#### ● HORIBA INSTRUMENTS LIMITED

Kyoto Close  
Summerhouse Road  
Moulton Park, Northampton  
NN3 6FL, U.K.  
Phone: 44 (1604) 542500  
Fax: 44 (1604) 542699

#### ● HORIBA EUROPE GmbH

**Head Office**  
Hans-Mess-Str.6  
D-61440 Oberursel/Ts.  
Germany  
Phone: 49 (6172) 1396-0  
Fax: 49 (6172) 137385

#### ● Leichlingen Facility

Julius-kronenberg Strasse  
D-42799 Leichlingen  
Germany  
Phone: 49 (2175) 8978-0  
Fax: 49 (2175) 8978-50

#### ● HORIBA FRANCE

12, Avenue des Tropiques  
91955 LES ULIS  
France  
Phone: 33 (1) 69-29-96-23  
Fax: 33 (1) 69-29-95-77

#### ● HORIBA SWEDEN

Sydhamsvägen 55-57,  
SE-151 38 Södertälje,  
Sweden  
Phone: 46 (8) 550-80701  
Fax: 46 (8) 550-80567

#### ● HORIBA ITALY

Europalace  
Corso Torino 43/45  
10043 Orbassano, Torino, Italy  
Phone: 39 (011) 9040601  
Fax: 39 (011) 9000448

Bulletin:HRE-3313A

**CALRIGHT INSTRUMENTS**

The Right Source For Your Test & Measurement Needs

Printed in Japan ZR-TF(SK)33

8715 Mesa Point Terrace San Diego, CA 92154  
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012  
Email: [sales@calright.com](mailto:sales@calright.com) <http://www.calright.com>