


Mini Digital MultiMeter + IR Thermometer

8 Function, rugged designed multimeter with built-in IR Thermometer
Quickly identify overheating motors or locate hot spots on electrical panels and HVAC vents without contact

Features:

- Built-in IR Thermometer with laser pointer for locating hot spots
- 4:1 Distance to Target Ratio
- 2000 count large backlit dual LCD with easy-to-read digits
- Low current capability measure down to 0.1µA
- Max Hold
- Input fuse protection
- Auto power off and Data Hold
- Complete with test leads and 9V battery

BUILT IN IR
Thermometer 
Patented

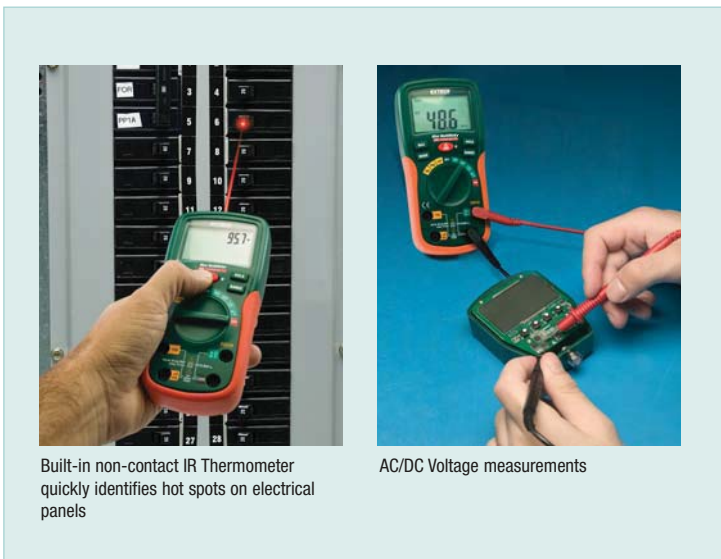

Built-in non-contact IR Thermometer quickly identifies hot spots on electrical panels

AC/DC Voltage measurements

Specifications	
AC Voltage	0.1mV to 600V
DC Voltage	0.1mV to 600V
Basic Accuracy (VDC)	±0.5%
AC Current	0.1µA to 10A
DC Current	0.1µA to 10A
Resistance	0.1Ω to 20MΩ
Temperature (IR)	-5 to 446°F (-20 to 230°C)
Continuity / Diode	Yes
Dimensions	5.8x2.9x1.6" (147x76x42mm)
Weight	9.17oz (260g)

Ordering Information

- EX210Autoranging MultiMeter + IR Thermometer
EX210-NISTL*EX210 with Limited NIST Certificate
EX210-NISTEX210 with NIST Certificate

* Product certifies to all functions except IR Thermometer



The Right Source For Your Test & Measurement Needs

8715 Mesa Point Terrace San Diego, CA 92154
Toll Free: 1.866.363.6634 Tel: 1.619.429.4545 Fax: 1.619.374.7012
Email: sales@calright.com <http://www.calright.com>