

IRT20

Insulation Resistance Tester

Affordable, Rugged, Hand-Cranked Megohmeter Ready When You Are

- 1000, 500 and 250 Volt output ranges
- Sealed, water resistant, rugged metal housing
- J
- Hand-crank power supply
- Accurate to within one division
- Damping time exceeds 4 seconds



IRT20 • Insulation Resistance Tester


The IRT20 is an affordable, rugged, hand-cranked Megohmeter that is ready to go when you are. Check motor and generator windings, power transformers, and electrical lines. It's heavy-duty construction and multiple output ranges make it suitable for a wide variety of applications, even in harsh environments.

The IRT20 has the following features:

- 1000, 500 and 250 Volt output ranges
- Sealed, water resistant rugged metal housing
- Damping time exceeds 4 seconds
- Hand-crank power supply
- Accurate to within one division
- One year limited warranty

Standard Accessories:

Test Leads.....ATL91

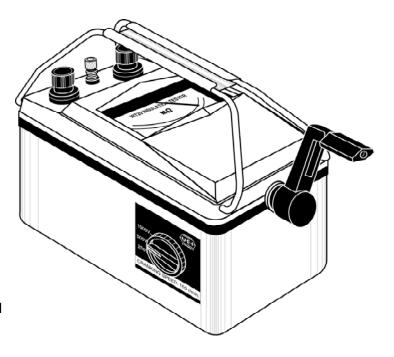

Specifications

Voltage	Range	Scale Drive
250 V	.01 - 250 MΩ	.05 M
500 V	.01 - 500 MΩ	.1 M
1000 V	.01 - 1000 MΩ	.2 M
Accuracy at 77°F (20°C)	±1% of full scale	
Insulation Resistance	Not less than 20 M	
AT 77°F (20°C)		
Damping Time	Better than 4 seconds	
Dimensions	215 mm x 120 mm x 150 mm	

